

# SNMP Guide

JEUS 9

**TMAXSOFT**

# Copyright

Copyright 2024. TmaxSoft Co., Ltd. All Rights Reserved.

## Company Information

TmaxSoft Co., Ltd.

TmaxTower 8-9F, 29, Hwangsaek-ro 258 beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea

Website: <https://www.tmaxsoft.com/en/>

## Restricted Rights Legend

All TmaxSoft Software (JEUS®) and documents are protected by copyright laws and international convention. TmaxSoft software and documents are made available under the terms of the TmaxSoft License Agreement and this document may only be distributed or copied in accordance with the terms of this agreement. No part of this document may be transmitted, copied, deployed, or reproduced in any form or by any means, electronic, mechanical, or optical, without the prior written consent of TmaxSoft Co., Ltd. Nothing in this software document and agreement constitutes a transfer of intellectual property rights regardless of whether or not such rights are registered) or any rights to TmaxSoft trademarks, logos, or any other brand features.

This document is for information purposes only. The company assumes no direct or indirect responsibilities for the contents of this document, and does not guarantee that the information contained in this document satisfies certain legal or commercial conditions. The information contained in this document is subject to change without prior notice due to product upgrades or updates. The company assumes no liability for any errors in this document.

## Trademarks

JEUS® is registered trademark of TmaxSoft Co., Ltd.

Java, Solaris are registered trademarks of Oracle Corporation and its subsidiaries and affiliates.

Microsoft, Windows, Windows NT are registered trademarks or trademarks of Microsoft Corporation.

HP-UX is a registered trademark of Hewlett Packard Enterprise Company.

AIX is a registered trademark of International Business Machines Corporation.

UNIX is a registered trademark of X/Open Company, Ltd.

Linux is a registered trademark of Linus Torvalds.

Noto is a trademark of Google Inc. Noto fonts are open source. All Noto fonts are published under the SIL Open Font License, Version 1.1. (<https://www.google.com/get/noto/>)

Other products and company names are trademarks or registered trademarks of their respective owners.

The names of companies, systems, and products mentioned in this manual may not necessarily be indicated with a trademark symbol (™, ®).

## Open Source Software Notice

Some modules or files of this product are subject to the terms of the following licenses: APACHE2.0, CDDL1.0, EDL1.0, OPEN SYMPHONY SOFTWARE1.1, TRILEAD-SSH2, Bouncy Castle, BSD, MIT, SIL OPEN FONT1.1

Detailed Information related to the license can be found in the following directory:  
\${INSTALL\_PATH}/license/oss\_licenses

## Document History

Product Version	Guide Version	Date	Remarks
JEUS 9	3.1.1	2024-12-24	-

# Contents

1. Introduction .....	1
1.1. Overview .....	1
1.2. Components .....	1
2. SNMP Agent .....	3
2.1. Overview .....	3
2.2. Configuring the SNMP Adapter .....	3
3. SNMP MIB .....	5
3.1. Overview .....	5
3.2. Browsing the MIB .....	5
3.3. Object Identifier (OID) .....	5
3.4. JEUS SNMP OID Suffix .....	6
3.5. Static OID and Dynamic OID .....	7
4. SNMP Manager Application .....	9
4.1. Overview .....	9
4.2. SNMP Client Program Sample .....	9
5. SNMP Example .....	12
Appendix A: JEUS SNMP MIB Information .....	13
A.1. Overview .....	13
A.2. Mapping OID to Attributes .....	13
A.3. TMAX-JEUS8.0-MIB.mib .....	26

# 1. Introduction

This chapter describes the basic concept and structure of JEUS SNMP. This chapter describes the relationship between the JEUS SNMP agent and the JEUS system and the relationship between JEUS SNMP agent and the JEUS JMX . This chapter also describes an SNMP manager application that exchanges messages with the SNMP agent.

## 1.1. Overview

SNMP stands for Simple Network Management Protocol. It is a standard protocol to monitor hardware and software in the network. The JMX 1.2 specifications provide protocol adapter that supports SNMP. The Jakarta Management 1.1 specification defines a Management Information Base (MIB) that is used by the network or system management protocols for Internet communications.

## 1.2. Components

The main components for the JEUS SNMP agent are as follows:

- **JEUS SNMP Agent**

Communicates with the JMX Mbean server and logically resides in JEUS. JEUS SNMP agent provides base structure to manage JEUS and implements Jakarta Management 1.1. For more information about JEUS server structure, refer to "JEUS Server Guide".

Provides the JEUS management information structure. The MIB file name is TMAX-JEUS-8.0-MIB.mib.

- **SNMP Manager**

Exchanges messages with the SNMP agent.

When the SNMP Manager application sends SNMP messages, the SNMP agent listens to the specified port. If a request comes through the port, the SNMP agent finds the OID in the MIB-tree to find the protocol data unit (hereafter PDU) type, and calls the JEUS JMX MBean server. When the SNMP agent receives the desired information, it returns the value to the SNMP Manager application.

### **SNMP Agent**

The JEUS SNMP Agent module is a useful component to monitor the JEUS management system through SNMP.

As a management protocol for web application server, the JEUS SNMP agent communicates with the JEUS JMX MBean server and supports the SNMP Manager application.

The JEUS SNMP agent supports the following protocols.

- SNMPv1
- SNMPv2
- SNMPv3

The JEUS SNMP agent operates based on the JEUS JMX. The JEUS SNMP agent uses the JEUS JMX API to retrieve information. The SNMP agent uses the JEUS JMX API as the second-level service component of the JEUS management system, and each JEUS SNMP agent is related to one of the JVMs like a server in the JEUS system.

For example, the JMX Mbean manages the information about all modules that are deployed on the EJB engine. The SNMP Manager sends the information (JEUS SNMP OID) to the SNMP agent of an EJB engine to retrieve information about the deployed modules.

The SNMP agent instance runs as a protocol adapter for JEUS JMX and handles SNMP packets received from SNMP Manager applications. The SNMP agent also listens on the specified port for SNMP Manager requests. If the port is not specified, the SNMP agent does not run.

All agent instances work in the same way. Therefore, each agent can retrieve all information concerning JEUS management system. In order to run more than one agent instance on the same machine, the port numbers should be different.



To run the JEUS SNMP agent, the SNMP adapter port must be set.

## SNMP Manager Application

The SNMP Manager is an application that manages a specific system, especially one that manages communication tools. In Jakarta EE, the SNMP Manager manages enterprise applications, especially middleware like Web Application Server (WAS).

The SNMP Manager application sends management information request to the SNMP agent, with references to MIB. The application parses the MIB file to analyze the structure of the information and makes it easier for the Manager to read and manage the information.

## 2. SNMP Agent

This chapter describes about environment configurations of the JEUS SNMP agent.

### 2.1. Overview

JEUS SNMP agents have characteristics of J2EE components as well as that of the enterprise message-oriented middleware.

- Fully supports the Jakarta management 1.1 specifications.
- Supports SNMPv1 and SNMPv2, which are commonly used as NMS protocols.

All SNMP Managers that use SNMPv1 and SNMPv2 can retrieve internal information from JEUS through the agent.

- Provides SNMPv3 for secure communication with SNMP agents.

SNMP Manager is required to securely communicate with SNMP agents. All SNMP Managers that use SNMPv3 can securely retrieve information.

- JEUS SNMP agents can be executed on each of their corresponding JEUS JVM (server).

### 2.2. Configuring the SNMP Adapter

The following explains how to configure an SNMP agent using the JEUS configuration file (domain.xml).

```
<server>
...
  <jmx-manager>
    ...
    <snmp-adaptor>
      <snmp-adaptor-port>8099</snmp-adaptor-port>
      <snmp-version>3</snmp-version>
      <snmp-max-packet-size>256</snmp-max-packet-size>
      <trap-demon>
        <ip-address>127.0.0.1</ip-address>
        <port>9099</port>
      </trap-demon>
      <pooling>
        <min>1</min>
        <max>5</max>
        <period>30000</period>
      </pooling>
    </snmp-adaptor>
    ...
  </jmx-manager>
  ...
</server>
```

The following describes each item.

Item	Description
Snmp Adaptor Port	Listener port of the SNMP adapter. SNMP Manager can request management information through this port.
Snmp Version	SNMP version. 1, 2, or 3 can be used.
Snmp Max Packet Size	Maximum SNMP packet size. The minimum size is 256 bytes.
Snmp Security	Indicates whether to enable SNMP security. Security can only be specified in SNMPv3.
Trap Demon	Server to send TRAP messages to after an error occurs.  Multiple addresses can be used. Messages will be sent to all specified IP addresses.
Pooling	If requests arrive for SNMP agent simultaneously, a thread pool can be used. <ul style="list-style-type: none"><li>◦ Min, Max: The minimum &amp; the maximum number of worker threads.</li><li>◦ Period: Worker thread check interval.</li></ul>



The thread pool configuration is shared by various JEUS components. For more information, refer to relevant guides.



## 3. SNMP MIB

This chapter describes the SNMP MIB.

### 3.1. Overview

You can access all JEUS server attributes, which are defined in JEUS MIB. The MIB is a part of the standard SNMP.



Refer to [www.ietf.org](http://www.ietf.org) for information about MIB.

### 3.2. Browsing the MIB

The JEUS MIB file is defined in the file, TMAX-JEUS8.0-MIB.mib, in the following directory.

```
JEUS_HOME/lib/system
```

You can open the MIB file directly, and check the OID attribute mapping information in [JEUS SNMP MIB Information](#).


Third party MIB browsers can be used. JEUS does not provide a MIB browser, but most of SNMP utility vendors provide one.

### 3.3. Object Identifier (OID)

Object ID (OID) is a sequence of integers that uniquely identifies a managed object and defines the path to the object using the OID tree. The OID is defined in the MIB file.

Each OID is mapped to each attribute of the JEUS Mbean. To get information on a particular OID, send a SNMP packet with the OID value to the JEUS SNMP agent.

The following is the JEUS MIB OID tree.

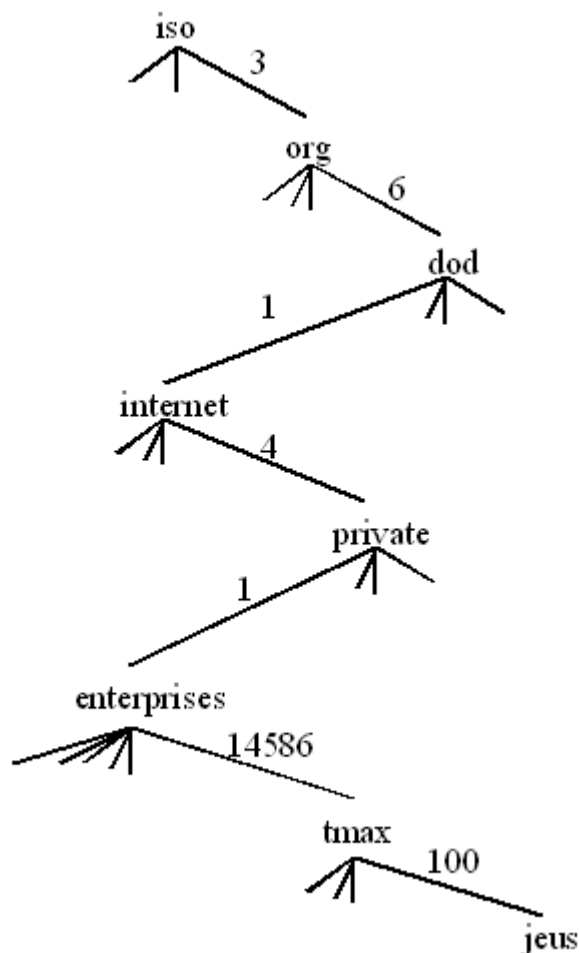

JEUS MIB OID

TmaxSoft Enterprise OID is 1.3.6.1.4.1.14586 so the prefix of all JEUS attributes is 1.3.6.1.4.1.14586.100.

For example, the OID of the server version attribute of the JEUS Manager is 1.3.6.1.4.1.14586.100.3.2.

### 3.4. JEUS SNMP OID Suffix

The following is standard suffixes for retrieving an object array.

Suffix	Description
0	Gets all objects.
1	Gets the first object among all the objects.

For example, in the OID 1.3.6.1.4.1.14586.100.9.1.1, 1.3.6.1.4.1.14586.100.9.1 refers to EJB module object name attribute, and 1.3.6.1.4.1.14586.100.9.1.1 refers to the first EJB module object name. Therefore, GET\_NEXT 1.3.6.1.4.1.14586.100.9.1 returns the value 1.3.6.1.4.1.14586.100.9.2 instead of 1.3.6.1.4.1.14586.100.9.1.1.

The JEUS SNMP agent provides a special OID suffix "9999" to retrieve the total number of objects. For example, GET 1.3.6.1.4.1.14586.100.9.1.9999 will return 10 if 10 EJB modules are deployed on JEUS.



Not all trees have a suffix, so only the actual OID can be searched.

## 3.5. Static OID and Dynamic OID

JEUS supports two kinds of OIDs.

- **Static OID**

- The static OID is made up of only MIB-based information.
- Objects that have the same characteristics have the same OID. If multiple objects have the same OID, their values are returned in a list.

For example, when two web containers operate in JEUS, if an OID that corresponds to the container names is requested, a list of values, such as [server name1, server name2], is returned.

- It is not easy to monitor an object if multiple objects have the same OID.

- **Dynamic OID**

- Dynamic OID made by appending 32 numbers separated by "." to MIB-based OID value in order to allocate a unique OID to an object (Example: [MIB-based OID].1.2.3.4.5---.31.32).
- Dynamic OID made by appending 32 numbers separated by "." to MIB-based OID value in order to allocate a unique OID to an object (Example: [MIB-based OID].1.2.3.4.5---.31.32).
- The SNMP agent dynamically creates a 32-digit OID when an object is created. It is easy to monitor a specific object because each object has a dynamic OID.

The following shows the difference of using static OID and dynamic OID for getting the maximum and minimum values of the thread pool of each container, when two containers operate in JEUS.

- Using Static OID

A list of objects that correspond to the MIB based OID is returned.

```
[OID for maximum value]=[ maximum, maximum' ], [OID for minimum value]=[ minimum, minimum' ]
```

In the returned list, it is not possible to tell whether the maximum and minimum values in the same position are values from the same container. A value from one container can be placed in the first or second positions.

- Using Dynamic OID

The result is displayed as follows. It provides the exact values for each object.

```
[OID for maximum value].[Dynamic OID of server1]=maximum, [OID for minimum value].[Dynamic OID of server1]=minimum
```

In JEUS, SNMP uses the dynamic OID by default. In order to use the static OID, execute the following through the JEUS execution script.

```
-Djeus.management.snmp.dynamic=false
```

## 4. SNMP Manager Application

This chapter describes how to develop JEUS SNMP Manager applications and how to configure them.

### 4.1. Overview

SNMP Managers that conforms to the SNMP (SNMPv1, SNMPv2, and SNMPv3) standard can be integrated with JEUS SNMP.



For more information about SNMP, refer to the SNMP Management Framework related specification (Jakarta management 1.1 specification).

### 4.2. SNMP Client Program Sample

Application types vary depending on the occasion. This section shows a client program that uses the SNMP4J API.

SNMP4J is an open source API and provides SNMP implementation classes for J2SE 1.4 or higher. The SNMP client application, that uses SNMP4J API, must perform the following steps.

1. Set the SNMP object OID and the PDU type.
2. Set the address and port number of the target, where SNMP information will be retrieved from, and set the SNMP version. Since JEUS SNMP uses UDP, use the UDPAddress.
3. Create an SNMP message object and then a message to send.
4. Send a message and receive a response.

#### Example

The following is a SNMP client application program example that uses the SNMP4J API.

SNMP Client Application: <SnmclientSample.java>

```
import java.net.*;
import java.util.*;
import org.snmp4j.*;
import org.snmp4j.PDU;
import org.snmp4j.mp.SnmpConstants;
import org.snmp4j.event.ResponseEvent;
import org.snmp4j.transport.*;
import org.snmp4j.smi.*;

public class SnmclientSample{
    static int defaultPort = 9999;
    static String defaultIP = "127.0.0.1";
    static String defaultOID = "1.3.6.1.4.1.14586.100.2.1";
```

```

static void testGetNext(String oid) throws java.io.IOException {
    //1. Make Protocol Data Unit
    PDU pdu = new PDU();
    pdu.add(new VariableBinding(new OID(defaultOID)));
    pdu.setType(PDU.GETNEXT);

    //2. Make target
    CommunityTarget target = new CommunityTarget();
    UdpAddress targetAddress = new UdpAddress();
    targetAddress.setInetAddress(InetAddress.getByName(defaultIP));
    targetAddress.setPort(defaultPort);
    target.setAddress(targetAddress);
    target.setCommunity(new OctetString("public"));
    target.setVersion(SnmpConstants.version1);

    //3. Make SNMP Message. Simple!
    Snmp snmp = new Snmp(new DefaultUdpTransportMapping());

    //4. Send Message and Recieve Response
    snmp.listen();
    ResponseEvent response = snmp.send(pdu, target);
    if (response.getResponse() == null) {
        System.out.println("Error: There is some problems.");
    } else {
        Vector variableBindings = response.getResponse().getVariableBindings();
        for( int i = 0; i < variableBindings.size(); i++){
            System.out.println(variableBindings.get(i));
        }
    }
    snmp.close();
}

public static void main(String[] args) throws java.io.IOException {
    // get the SNMP port number
    if (args.length > 0) {
        defaultPort = Integer.parseInt (args[0]);
    }
    System.out.println ("PORT : " + defaultPort);

    // get the ip address of the machine that the SNMP agent runs on
    if (args.length > 1) {
        defaultIP = args[1];
    }
    System.out.println ("IP : " + defaultIP);

    // get the OID number that you want to get the value of
    if (args.length > 2) {
        defaultOID = args[2];
    }
    System.out.println ("OID : " + defaultOID);
    try {
        testGetNext(defaultOID);
    } catch (Exception ex) {
        System.out.println ("ex *** : " + ex);
        ex.printStackTrace ();
    }
}
}

```



Refer to [SNMP4j Official Documentation](#) for information about SNMP4j API.

## 5. SNMP Example

This chapter describes how to start JEUS SNMP agent and how the SNMP client application retrieves monitoring information from JEUS.

1. Modify the SNMP client example program in [SNMP Client Program Sample](#) and compile it. In order to compile the example program, SNMP4j is required. You can download the SNMP4j API at [www.snmp4j.org](http://www.snmp4j.org).
2. Refer to [Configuring the SNMP Adapter](#) in [SNMP Agent](#) to configure the SNMP Adaptor. The example uses port 9999, so set the SNMP Adapter port to '9999'.
3. Restart the server. If SNMP Adapter is in use, the following log appears.

```
. . .  
[2016.08.03 16:32:12][0] [adminServer-1] [SNMP-0004] The SNMP agent is ready using the port 9999.  
. . .
```



This example assumes the JEUS server name as 'adminServer'.

4. Execute the example program created in step 1. Set the classpath to SNMP4j in order to run the program. This example assumes that SNMP4j is the file 'SNMP4j.jar' under the '/home/user1/lib' directory.

```
$ java -classpath /home/user1/lib/SNMP4J.jar SnpclientSample  
PORT : 9999  
IP : 127.0.0.1  
OID : 1.3.6.1.4.1.14586.100.2.1  
1.3.6.1.4.1.14586.100.2.1.0 = [JEUS:JMXManager=adminServer,j2eeType=J2EEDomain,name=domain1]
```



This program is set to access the port number, 127.0.0.1:9999. In order to access a different address and port, provide parameter values for the port number and IP address when executing the program.



# Appendix A: JEUS SNMP MIB Information

This appendix describes the JEUS SNMP MIB in detail.

## A.1. Overview

The developers for SNMP Manager need the MIB file as a reference. The JEUS MIB file, TMAX-JEUS8.0-MIB.mib, is located in the following directory.

```
JEUS_HOME/lib/system
```

This file can be used to check the mapping of JEUS SNMP MIB file contents and their attribute values and the mapping of OIDs.

## A.2. Mapping OID to Attributes

For better understanding of TMAX-JEUS-MIB, this section provides a simple table of OIDs and attributes.

The mapping format is as follows:

```
[OID(Group name)] [Attribute(attribute name)]
```

The common prefix "1.3.6.1.4.1.14586.100." for all OIDs is omitted. (TmaxSoft Enterprise Id is 14586 and JEUS product Id is 100).

The difference in the mapping format, from JEUS 4.x version, is that **[OID(Group Name)]** is placed before **[Attribute(Attribute Name)]**. This is to prevent creating a duplicate MIB object name.

The following is a table of OIDs and attributes.

```
2.1 j2EEDomainobjectName
2.2 j2EEDomainservers
2.3 j2EEDomaintroubles
2.4 j2EEDomainownTroubles
3.1 j2EEServerobjectName
3.2 j2EEServerserverVersion
3.3 j2EEServerserverVendor
3.4 j2EEServerjavaVMs
3.5 j2EEServerdeployedObjects
3.6 j2EEServerresources
3.8 j2EEServerjeusServices
3.9 j2EEServerengines
3.10 j2EEServerenginesFromDescriptor
3.15 j2EEServerdistributedModules
3.17 j2EEServernodeName
```

- 3.18 j2EEServerappPaths
- 3.19 j2EEServertroubles
- 3.20 j2EEServerownTroubles
- 4.1 jVMobjectName
- 4.2 jVMjavaVersion
- 4.3 jVMjavaVendor
- 4.4 jVMnode
- 4.6 jVMoSName
- 4.7 jVMoSVersion
- 4.8 jVMallProperties
- 4.9 jVMtroubles
- 4.10 jVMownTroubles
- 4.101 jVMheapSize-upperBound
- 4.102 jVMheapSize-lowerBound
- 4.103 jVMheapSize-highWaterMark
- 4.104 jVMheapSize-lowWaterMark
- 4.105 jVMheapSize-current
- 4.111 jVMupTime-count
- 4.121 jVMtotalSize-highWaterMark
- 4.122 jVMtotalSize-lowWaterMark
- 4.123 jVMtotalSize-current
- 6.1 j2EEApplicationobjectName
- 6.2 j2EEApplicationdeploymentDescriptor
- 6.3 j2EEApplicationserver
- 6.4 j2EEApplicationmodules
- 6.5 j2EEApplicationmoduleType
- 6.6 j2EEApplicationapplicationType
- 6.7 j2EEApplicationjeusDeploymentPlan
- 6.8 j2EEApplicationtargetModuleID
- 6.9 j2EEApplicationtroubles
- 6.10 j2EEApplicationownTroubles
- 8.1 appClientModuleobjectName
- 8.2 appClientModuledeploymentDescriptor
- 8.3 appClientModuleserver
- 8.4 appClientModulejavaVMs
- 8.5 appClientModuleapplicationType
- 8.6 appClientModulemoduleType
- 8.7 appClientModulejeusDeploymentPlan
- 8.8 appClientModuletargetModuleID
- 8.9 appClientModuletroubles
- 8.10 appClientModuleownTroubles
- 9.1 eJBModuleobjectName
- 9.2 eJBModuledeploymentDescriptor
- 9.3 eJBModuleserver
- 9.4 eJBModulejavaVMs
- 9.5 eJBModuleejbs
- 9.6 eJBModuleejbCount
- 9.7 eJBModuleclientViewPath
- 9.8 eJBModulejeusDeploymentPlan
- 9.9 eJBModuletargetModuleID
- 9.10 eJBModulemoduleType
- 9.11 eJBModuleapplicationType
- 9.12 eJBModuletroubles
- 9.13 eJBModuleownTroubles
- 11.1 messageDrivenBeanobjectName
- 11.2 messageDrivenBeantroubles
- 11.3 messageDrivenBeanownTroubles
- 11.101 messageDrivenBeancreateCount-count
- 11.111 messageDrivenBeanremoveCount-count

11.121 messageDrivenBeanrequestCount-count  
 11.131 messageDrivenBeancommittedCount-count  
 11.141 messageDrivenBeanrolledbackCount-count  
 11.151 messageDrivenBeantimeoutRolledbackCount-count  
 11.161 messageDrivenBeanmessageCount-count  
 11.171 messageDrivenBeanactiveEJBBeanCount-highWaterMark  
 11.172 messageDrivenBeanactiveEJBBeanCount-lowWaterMark  
 11.173 messageDrivenBeanactiveEJBBeanCount-current  
 11.181 messageDrivenBeantotalEJBBeanCount-highWaterMark  
 11.182 messageDrivenBeantotalEJBBeanCount-lowWaterMark  
 11.183 messageDrivenBeantotalEJBBeanCount-current  
 12.1 entityBeanobjectName  
 12.2 entityBeantroubles  
 12.3 entityBeanownTroubles  
 12.101 entityBeancreateCount-count  
 12.111 entityBeanremoveCount-count  
 12.121 entityBeanrequestCount-count  
 12.131 entityBeancommittedCount-count  
 12.141 entityBeanrolledbackCount-count  
 12.151 entityBeantimeoutRolledbackCount-count  
 12.161 entityBeanreadyCount-highWaterMark  
 12.162 entityBeanreadyCount-lowWaterMark  
 12.163 entityBeanreadyCount-current  
 12.171 entityBeanpooledCount-highWaterMark  
 12.172 entityBeanpooledCount-lowWaterMark  
 12.173 entityBeanpooledCount-current  
 12.181 entityBeanautoRemovedEJBObjectCount-count  
 12.191 entityBeantotalEJBBeanCount-highWaterMark  
 12.192 entityBeantotalEJBBeanCount-lowWaterMark  
 12.193 entityBeantotalEJBBeanCount-current  
 12.201 entityBeanactiveEJBBeanCount-highWaterMark  
 12.202 entityBeanactiveEJBBeanCount-lowWaterMark  
 12.203 entityBeanactiveEJBBeanCount-current  
 12.211 entityBeantotalThreadCount-highWaterMark  
 12.212 entityBeantotalThreadCount-lowWaterMark  
 12.213 entityBeantotalThreadCount-current  
 12.221 entityBeanactiveThreadCount-highWaterMark  
 12.222 entityBeanactiveThreadCount-lowWaterMark  
 12.223 entityBeanactiveThreadCount-current  
 12.231 entityBeantotalEJBObjectCount-highWaterMark  
 12.232 entityBeantotalEJBObjectCount-lowWaterMark  
 12.233 entityBeantotalEJBObjectCount-current  
 12.241 entityBeanactiveEJBObjectCount-highWaterMark  
 12.242 entityBeanactiveEJBObjectCount-lowWaterMark  
 12.243 entityBeanactiveEJBObjectCount-current  
 12.251 entityBeanpassiveCount-highWaterMark  
 12.252 entityBeanpassiveCount-lowWaterMark  
 12.253 entityBeanpassiveCount-current  
 14.1 statefulSessionBeanobjectName  
 14.2 statefulSessionBeantroubles  
 14.3 statefulSessionBeanownTroubles  
 14.101 statefulSessionBeancreateCount-count  
 14.111 statefulSessionBeanremoveCount-count  
 14.121 statefulSessionBeanrequestCount-count  
 14.131 statefulSessionBeancommittedCount-count  
 14.141 statefulSessionBeanrolledbackCount-count  
 14.151 statefulSessionBeantimeoutRolledbackCount-count  
 14.161 statefulSessionBeanmethodReadyCount-highWaterMark  
 14.162 statefulSessionBeanmethodReadyCount-lowWaterMark

14.163 statefulSessionBeanmethodReadyCount-current  
 14.171 statefulSessionBeanpassiveCount-highWaterMark  
 14.172 statefulSessionBeanpassiveCount-lowWaterMark  
 14.173 statefulSessionBeanpassiveCount-current  
 14.181 statefulSessionBeanautoRemovedEJBObjectCount-count  
 14.191 statefulSessionBeantotalEJBBeanCount-highWaterMark  
 14.192 statefulSessionBeantotalEJBBeanCount-lowWaterMark  
 14.193 statefulSessionBeantotalEJBBeanCount-current  
 14.201 statefulSessionBeanactiveEJBBeanCount-highWaterMark  
 14.202 statefulSessionBeanactiveEJBBeanCount-lowWaterMark  
 14.203 statefulSessionBeanactiveEJBBeanCount-current  
 14.211 statefulSessionBeantotalThreadCount-highWaterMark  
 14.212 statefulSessionBeantotalThreadCount-lowWaterMark  
 14.213 statefulSessionBeantotalThreadCount-current  
 14.221 statefulSessionBeanactiveThreadCount-highWaterMark  
 14.222 statefulSessionBeanactiveThreadCount-lowWaterMark  
 14.223 statefulSessionBeanactiveThreadCount-current  
 14.231 statefulSessionBeantotalEJBObjectCount-highWaterMark  
 14.232 statefulSessionBeantotalEJBObjectCount-lowWaterMark  
 14.233 statefulSessionBeantotalEJBObjectCount-current  
 14.241 statefulSessionBeanactiveEJBObjectCount-highWaterMark  
 14.242 statefulSessionBeanactiveEJBObjectCount-lowWaterMark  
 14.243 statefulSessionBeanactiveEJBObjectCount-current  
 14.251 statefulSessionBeanfileDBSizeCount-highWaterMark  
 14.252 statefulSessionBeanfileDBSizeCount-lowWaterMark  
 14.253 statefulSessionBeanfileDBSizeCount-current  
 15.1 statelessSessionBeanobjectName  
 15.2 statelessSessionBeantroubles  
 15.3 statelessSessionBeanownTroubles  
 15.101 statelessSessionBeancreateCount-count  
 15.111 statelessSessionBeanremoveCount-count  
 15.121 statelessSessionBeanrequestCount-count  
 15.131 statelessSessionBeancommittedCount-count  
 15.141 statelessSessionBeanrolledbackCount-count  
 15.151 statelessSessionBeantimeoutRolledbackCount-count  
 15.161 statelessSessionBeanmethodReadyCount-highWaterMark  
 15.162 statelessSessionBeanmethodReadyCount-lowWaterMark  
 15.163 statelessSessionBeanmethodReadyCount-current  
 15.171 statelessSessionBeantotalEJBBeanCount-highWaterMark  
 15.172 statelessSessionBeantotalEJBBeanCount-lowWaterMark  
 15.173 statelessSessionBeantotalEJBBeanCount-current  
 15.181 statelessSessionBeanactiveEJBBeanCount-highWaterMark  
 15.182 statelessSessionBeanactiveEJBBeanCount-lowWaterMark  
 15.183 statelessSessionBeanactiveEJBBeanCount-current  
 15.191 statelessSessionBeantotalThreadCount-highWaterMark  
 15.192 statelessSessionBeantotalThreadCount-lowWaterMark  
 15.193 statelessSessionBeantotalThreadCount-current  
 15.201 statelessSessionBeanactiveThreadCount-highWaterMark  
 15.202 statelessSessionBeanactiveThreadCount-lowWaterMark  
 15.203 statelessSessionBeanactiveThreadCount-current  
 16.1 webModuleobjectName  
 16.2 webModuledeploymentDescriptor  
 16.3 webModuleserver  
 16.4 webModulejavaVMs  
 16.5 webModuleservlets  
 16.6 webModulecontextGroupObjectName  
 16.7 webModulecontextGroup  
 16.8 webModulerealDocBase  
 16.9 webModulejeusDeploymentPlan

- 16.10 webModuletargetModuleID
- 16.11 webModulemoduleType
- 16.12 webModuleapplicationType
- 16.13 webModuleautoReload
- 16.14 webModuletroubles
- 16.15 webModuleownTroubles
- 16.101 webModulerequestCount-count
- 16.111 webModuleallSessionsSize-count
- 16.121 webModuleactiveSessionsSize-count
- 16.131 webModulepassivateSessionsSize-count
- 16.141 webModulelocalSessionsSize-count
- 16.151 webModuleprocessingTime-count
- 17.1 servletobjectName
- 17.2 servletservletInfo
- 17.3 servletaverageExecutionTime
- 17.4 servlettroubles
- 17.5 servletownTroubles
- 17.101 servletserviceTime-count
- 17.102 servletserviceTime-maxTime
- 17.103 servletserviceTime-minTime
- 17.104 servletserviceTime-totalTime
- 18.1 resourceAdapterModuleobjectName
- 18.2 resourceAdapterModuledeploymentDescriptor
- 18.3 resourceAdapterModuleserver
- 18.4 resourceAdapterModulejavaVMs
- 18.6 resourceAdapterModulemoduleType
- 18.7 resourceAdapterModuleapplicationType
- 18.8 resourceAdapterModulejeusDeploymentPlan
- 18.9 resourceAdapterModuletargetModuleID
- 18.10 resourceAdapterModulemin
- 18.11 resourceAdapterModulemax
- 18.12 resourceAdapterModulestep
- 18.13 resourceAdapterModulekeepAliveTime
- 18.14 resourceAdapterModulereleaseTimeout
- 18.15 resourceAdapterModulerejectTimeout
- 18.16 resourceAdapterModuletroubles
- 18.17 resourceAdapterModuleownTroubles
- 19.1 resourceAdapterobjectName
- 19.2 resourceAdaptertroubles
- 19.3 resourceAdapterownTroubles
- 21.1 javaMailResourceobjectName
- 21.2 javaMailResourceproperty
- 21.3 javaMailResourcetroubles
- 21.4 javaMailResourceownTroubles
- 22.1 jCAResourceobjectName
- 22.4 jCAResourcecMInfo
- 22.5 jCAResourcetroubles
- 22.6 jCAResourceownTroubles
- 23.1 jCAConnectionFactoryobjectName
- 23.2 jCAConnectionFactorycMInfo
- 23.3 jCAConnectionFactorymin
- 23.4 jCAConnectionFactorymax
- 23.5 jCAConnectionFactorymaxWaiter
- 23.6 jCAConnectionFactorymaxDisposableCount
- 23.7 jCAConnectionFactorywaitTrial
- 23.8 jCAConnectionFactorywaitingTime
- 23.9 jCAConnectionFactorypooledTimeout
- 23.10 jCAConnectionFactorydissociationtimeout
- 23.11 jCAConnectionFactoryinvalidationtimeout

- 23.13 jCAConnectionFactoryskipMatching
- 23.14 jCAConnectionFactoryuseWrapper
- 23.15 jCAConnectionFactorytroubles
- 23.16 jCAConnectionFactoryownTroubles
- 24.1 jCManagedConnectionFactoryobjectName
- 24.2 jCManagedConnectionFactorytroubles
- 24.3 jCManagedConnectionFactoryownTroubles
- 25.1 JDBCResourceobjectName
- 25.2 JDBCResourcejdbcDataSources
- 25.3 JDBCResourcecPInfo
- 25.4 JDBCResourcetroubles
- 25.5 JDBCResourceownTroubles
- 25.101 JDBCResourceconnectionPools-createCount-count
- 25.111 JDBCResourceconnectionPools-closeCount-count
- 25.121 JDBCResourceconnectionPools-poolSize-upperBound
- 25.122 JDBCResourceconnectionPools-poolSize-lowerBound
- 25.123 JDBCResourceconnectionPools-poolSize-highWaterMark
- 25.124 JDBCResourceconnectionPools-poolSize-lowWaterMark
- 25.125 JDBCResourceconnectionPools-poolSize-current
- 25.131 JDBCResourceconnectionPools-freePoolSize-upperBound
- 25.132 JDBCResourceconnectionPools-freePoolSize-lowerBound
- 25.133 JDBCResourceconnectionPools-freePoolSize-highWaterMark
- 25.134 JDBCResourceconnectionPools-freePoolSize-lowWaterMark
- 25.135 JDBCResourceconnectionPools-freePoolSize-current
- 25.141 JDBCResourceconnectionPools-waitingThreadCount-highWaterMark
- 25.142 JDBCResourceconnectionPools-waitingThreadCount-lowWaterMark
- 25.143 JDBCResourceconnectionPools-waitingThreadCount-current
- 25.161 JDBCResourceconnectionPools-waitTime-count
- 25.162 JDBCResourceconnectionPools-waitTime-maxTime
- 25.163 JDBCResourceconnectionPools-waitTime-minTime
- 25.164 JDBCResourceconnectionPools-waitTime-totalTime
- 25.171 JDBCResourceconnectionPools-useTime-count
- 25.172 JDBCResourceconnectionPools-useTime-maxTime
- 25.173 JDBCResourceconnectionPools-useTime-minTime
- 25.174 JDBCResourceconnectionPools-useTime-totalTime
- 25.181 JDBCResourceconnectionPools-jdbcDataSource
- 26.1 JDBCDataSourceobjectName
- 26.2 JDBCDataSourcejdbcDriver
- 26.3 JDBCDataSourceconfig
- 26.4 JDBCDataSourcecPInfo
- 26.6 JDBCDataSourcetroubles
- 26.7 JDBCDataSourceownTroubles
- 26.101 JDBCDataSourcecreateCount-count
- 26.111 JDBCDataSourcecloseCount-count
- 26.121 JDBCDataSourcepoolSize-upperBound
- 26.122 JDBCDataSourcepoolSize-lowerBound
- 26.123 JDBCDataSourcepoolSize-highWaterMark
- 26.124 JDBCDataSourcepoolSize-lowWaterMark
- 26.125 JDBCDataSourcepoolSize-current
- 26.131 JDBCDataSourcefreePoolSize-upperBound
- 26.132 JDBCDataSourcefreePoolSize-lowerBound
- 26.133 JDBCDataSourcefreePoolSize-highWaterMark
- 26.134 JDBCDataSourcefreePoolSize-lowWaterMark
- 26.135 JDBCDataSourcefreePoolSize-current
- 26.141 JDBCDataSourcewaitingThreadCount-highWaterMark
- 26.142 JDBCDataSourcewaitingThreadCount-lowWaterMark
- 26.143 JDBCDataSourcewaitingThreadCount-current
- 26.151 JDBCDataSourceereConnectCount-count
- 26.161 JDBCDataSourcewaitTime-count

26.162 JDBCDataSourcewaitTime-maxTime  
 26.163 JDBCDataSourcewaitTime-minTime  
 26.164 JDBCDataSourcewaitTime-totalTime  
 26.171 JDBCDataSourceuseTime-count  
 26.172 JDBCDataSourceuseTime-maxTime  
 26.173 JDBCDataSourceuseTime-minTime  
 26.174 JDBCDataSourceuseTime-totalTime  
 27.1 JDBCDriverObjectName  
 27.2 JDBCDrivertroubles  
 27.3 JDBCDriverownTroubles  
 28.1 JMSResourceObjectName  
 28.3 JMSResourceclusterInfo  
 28.5 JMSResourceJMSConnectionFactoryResourceNames  
 28.6 JMSResourceJMSDestinationResourceNames  
 28.7 JMSResourceJMSClientResourceNames  
 28.9 JMSResourcefreeMemory  
 28.10 JMSResourcetotalMemory  
 28.11 JMSResourceJMSConnectionFactoryResources  
 28.12 JMSResourcetroubles  
 28.13 JMSResourceownTroubles  
 28.101 JMSResourceconnections-sessions-messageCount-count  
 28.111 JMSResourceconnections-sessions-pendingMessageCount-count  
 28.121 JMSResourceconnections-sessions-expiredMessageCount-count  
 28.131 JMSResourceconnections-sessions-messageWaitTime-count  
 28.132 JMSResourceconnections-sessions-messageWaitTime-maxTime  
 28.133 JMSResourceconnections-sessions-messageWaitTime-minTime  
 28.134 JMSResourceconnections-sessions-messageWaitTime-totalTime  
 28.141 JMSResourceconnections-sessions-durableSubscriptionCount-count  
 28.151 JMSResourceconnections-sessions-producers-destination  
 28.161 JMSResourceconnections-sessions-producers-messageCount-count  
 28.171 JMSResourceconnections-sessions-producers-pendingMessageCount-count  
 28.181 JMSResourceconnections-sessions-producers-expiredMessageCount-count  
 28.191 JMSResourceconnections-sessions-producers-messageWaitTime-count  
 28.192 JMSResourceconnections-sessions-producers-messageWaitTime-maxTime  
 28.193 JMSResourceconnections-sessions-producers-messageWaitTime-minTime  
 28.194 JMSResourceconnections-sessions-producers-messageWaitTime-totalTime  
 28.201 JMSResourceconnections-sessions-consumers-origin  
 28.211 JMSResourceconnections-sessions-consumers-messageCount-count  
 28.221 JMSResourceconnections-sessions-consumers-pendingMessageCount-count  
 28.231 JMSResourceconnections-sessions-consumers-expiredMessageCount-count  
 28.241 JMSResourceconnections-sessions-consumers-messageWaitTime-count  
 28.242 JMSResourceconnections-sessions-consumers-messageWaitTime-maxTime  
 28.243 JMSResourceconnections-sessions-consumers-messageWaitTime-minTime  
 28.244 JMSResourceconnections-sessions-consumers-messageWaitTime-totalTime  
 29.1 JNDIResourceObjectName  
 29.2 JNDIResourcetroubles  
 29.3 JNDIResourceownTroubles  
 30.1 JTAResourceObjectName  
 30.2 JTAResourceaverageExecutionTime  
 30.3 JTAResourceactiveTimeout  
 30.4 JTAResourceprepareTimeout  
 30.5 JTAResourcepreparedTimeout  
 30.6 JTAResourcecommitTimeout  
 30.7 JTAResourcerecoveryTimeout  
 30.8 JTAResourceincompleteTimeout  
 30.9 JTAResourceheuristicRollback  
 30.10 JTAResourceresolution  
 30.11 JTAResourcethreadPool  
 30.12 JTAResourcetroubles

30.13 jTAResourceownTroubles  
 30.101 jTAResourceactiveCount-count  
 30.111 jTAResourcecommittedCount-count  
 30.121 jTAResourcerolledbackCount-count  
 30.131 jTAResourcetimeoutCount-count  
 30.141 jTAResourcetimeoutRolledbackCount-count  
 30.151 jTAResourceactiveTimeoutCount-count  
 30.161 jTAResourceprepareTimeoutCount-count  
 30.171 jTAResourcepreparedTimeoutCount-count  
 30.181 jTAResourcecommitTimeoutCount-count  
 30.191 jTAResourceheuristicRolledbackCount-count  
 30.201 jTAResourceexecutionTime-count  
 30.202 jTAResourceexecutionTime-maxTime  
 30.203 jTAResourceexecutionTime-minTime  
 30.204 jTAResourceexecutionTime-totalTime  
 32.1 uRLResourceobjectName  
 32.2 uRLResourceuRLInfo  
 32.3 uRLResourcetroubles  
 32.4 uRLResourceownTroubles  
 33.1 jMSConnectionResourceobjectName  
 33.2 jMSConnectionResourcejMSSessionResourceNames  
 33.3 jMSConnectionResourcetroubles  
 33.4 jMSConnectionResourceownTroubles  
 33.101 jMSConnectionResourcesessions-messageCount-count  
 33.111 jMSConnectionResourcesessions-pendingMessageCount-count  
 33.121 jMSConnectionResourcesessions-expiredMessageCount-count  
 33.131 jMSConnectionResourcesessions-messageWaitTime-count  
 33.132 jMSConnectionResourcesessions-messageWaitTime-maxTime  
 33.133 jMSConnectionResourcesessions-messageWaitTime-minTime  
 33.134 jMSConnectionResourcesessions-messageWaitTime-totalTime  
 33.141 jMSConnectionResourcesessions-durableSubscriptionCount-count  
 33.151 jMSConnectionResourcesessions-producers-destination  
 33.161 jMSConnectionResourcesessions-producers-messageCount-count  
 33.171 jMSConnectionResourcesessions-producers-pendingMessageCount-count  
 33.181 jMSConnectionResourcesessions-producers-expiredMessageCount-count  
 33.191 jMSConnectionResourcesessions-producers-messageWaitTime-count  
 33.192 jMSConnectionResourcesessions-producers-messageWaitTime-maxTime  
 33.193 jMSConnectionResourcesessions-producers-messageWaitTime-minTime  
 33.194 jMSConnectionResourcesessions-producers-messageWaitTime-totalTime  
 33.201 jMSConnectionResourcesessions-consumers-origin  
 33.211 jMSConnectionResourcesessions-consumers-messageCount-count  
 33.221 jMSConnectionResourcesessions-consumers-pendingMessageCount-count  
 33.231 jMSConnectionResourcesessions-consumers-expiredMessageCount-count  
 33.241 jMSConnectionResourcesessions-consumers-messageWaitTime-count  
 33.242 jMSConnectionResourcesessions-consumers-messageWaitTime-maxTime  
 33.243 jMSConnectionResourcesessions-consumers-messageWaitTime-minTime  
 33.244 jMSConnectionResourcesessions-consumers-messageWaitTime-totalTime  
 33.251 jMSConnectionResourcesessionCount-count  
 33.261 jMSConnectionResourceconnectionConsumerCount-count  
 33.271 jMSConnectionResourceconnectionConsumers-origin  
 33.281 jMSConnectionResourceconnectionConsumers-messageCount-count  
 33.291 jMSConnectionResourceconnectionConsumers-pendingMessageCount-count  
 33.301 jMSConnectionResourceconnectionConsumers-expiredMessageCount-count  
 33.401 jMSConnectionResourceconnectionConsumers-messageWaitTime-count  
 33.402 jMSConnectionResourceconnectionConsumers-messageWaitTime-maxTime  
 33.403 jMSConnectionResourceconnectionConsumers-messageWaitTime-minTime  
 33.404 jMSConnectionResourceconnectionConsumers-messageWaitTime-totalTime  
 34.1 jMSConsumerResourceobjectName  
 34.2 jMSConsumerResourcedestination



34.3 jMSConsumerResourcedestinationResourceObjectName  
 34.4 jMSConsumerResource durableSubscriberResourceObjectName  
 34.5 jMSConsumerResourcesendTimeAvg  
 34.6 jMSConsumerResource troubles  
 34.7 jMSConsumerResource ownTroubles  
 34.101 jMSConsumerResource origin  
 34.111 jMSConsumerResource messageCount-count  
 34.121 jMSConsumerResource pendingMessageCount-count  
 34.131 jMSConsumerResource expiredMessageCount-count  
 34.141 jMSConsumerResource messageWaitTime-count  
 34.142 jMSConsumerResource messageWaitTime-maxTime  
 34.143 jMSConsumerResource messageWaitTime-minTime  
 34.144 jMSConsumerResource messageWaitTime-totalTime  
 34.151 jMSConsumerResourcesendTime-count  
 34.152 jMSConsumerResourcesendTime-maxTime  
 34.153 jMSConsumerResourcesendTime-minTime  
 34.154 jMSConsumerResourcesendTime-totalTime  
 35.1 jMSProducerResource objectName  
 35.3 jMSProducerResource destinationResourceObjectName  
 35.4 jMSProducerResource durableSubscriberResourceObjectName  
 35.5 jMSProducerResourcesendTimeAvg  
 35.6 jMSProducerResource destination  
 35.7 jMSProducerResource troubles  
 35.8 jMSProducerResource ownTroubles  
 35.111 jMSProducerResource messageCount-count  
 35.121 jMSProducerResource pendingMessageCount-count  
 35.131 jMSProducerResource expiredMessageCount-count  
 35.141 jMSProducerResource messageWaitTime-count  
 35.142 jMSProducerResource messageWaitTime-maxTime  
 35.143 jMSProducerResource messageWaitTime-minTime  
 35.144 jMSProducerResource messageWaitTime-totalTime  
 35.151 jMSProducerResourcesendTime-count  
 35.152 jMSProducerResourcesendTime-maxTime  
 35.153 jMSProducerResourcesendTime-minTime  
 35.154 jMSProducerResourcesendTime-totalTime  
 36.1 jMSSessionResource objectName  
 36.2 jMSSessionResource jMSEndPointConsumerNames  
 36.3 jMSSessionResource troubles  
 36.4 jMSSessionResource ownTroubles  
 36.101 jMSSessionResource messageCount-count  
 36.111 jMSSessionResource pendingMessageCount-count  
 36.121 jMSSessionResource expiredMessageCount-count  
 36.131 jMSSessionResource messageWaitTime-count  
 36.132 jMSSessionResource messageWaitTime-maxTime  
 36.133 jMSSessionResource messageWaitTime-minTime  
 36.134 jMSSessionResource messageWaitTime-totalTime  
 36.141 jMSSessionResource durableSubscriptionCount-count  
 36.151 jMSSessionResource producers-destination  
 36.161 jMSSessionResource producers-messageCount-count  
 36.171 jMSSessionResource producers-pendingMessageCount-count  
 36.181 jMSSessionResource producers-expiredMessageCount-count  
 36.191 jMSSessionResource producers-messageWaitTime-count  
 36.192 jMSSessionResource producers-messageWaitTime-maxTime  
 36.193 jMSSessionResource producers-messageWaitTime-minTime  
 36.194 jMSSessionResource producers-messageWaitTime-totalTime  
 36.201 jMSSessionResource consumers-origin  
 36.211 jMSSessionResource consumers-messageCount-count  
 36.221 jMSSessionResource consumers-pendingMessageCount-count  
 36.231 jMSSessionResource consumers-expiredMessageCount-count

36.241 jMSSessionResourceconsumers-messageWaitTime-count  
 36.242 jMSSessionResourceconsumers-messageWaitTime-maxTime  
 36.243 jMSSessionResourceconsumers-messageWaitTime-minTime  
 36.244 jMSSessionResourceconsumers-messageWaitTime-totalTime  
 36.251 jMSSessionResourcesendTime-count  
 36.252 jMSSessionResourcesendTime-maxTime  
 36.253 jMSSessionResourcesendTime-minTime  
 36.254 jMSSessionResourcesendTime-totalTime  
 36.261 jMSSessionResourcecommitCount-count  
 36.271 jMSSessionResourcerollbackCount-count  
 36.281 jMSSessionResourcetransactionCount-count  
 41.1 eJBEngineMoobjectName  
 41.2 eJBEngineMoblockThreadCount  
 41.3 eJBEngineMostats  
 41.4 eJBEngineMotroubles  
 41.5 eJBEngineMoownTroubles  
 51.1 contextGroupMoobjectName  
 51.2 contextGroupMowebModules  
 51.3 contextGroupMowebListeners  
 51.4 contextGroupMosessionContainer  
 51.5 contextGroupMosessionTimeout  
 51.6 contextGroupMotroubles  
 51.7 contextGroupMoownTroubles  
 52.1 dBConnectionPoolMoobjectName  
 52.2 dBConnectionPoolMoblockDuration  
 52.3 dBConnectionPoolModBConnectionPoolInfo-dBConnectionInfo  
 52.4 dBConnectionPoolModBConnectionPoolInfo-currentPoolSize  
 52.5 dBConnectionPoolModBConnectionPoolInfo-freeConnectionNum  
 52.6 dBConnectionPoolModBConnectionPoolInfo-activeConnectionNum  
 52.7 dBConnectionPoolModBConnectionPoolInfo-connectionPoolID  
 52.8 dBConnectionPoolModBConnectionPoolInfo-connectionPoolingRule  
 52.9 dBConnectionPoolModBConnectionPoolInfo-connectionUrl  
 52.10 dBConnectionPoolModBConnectionPoolInfo-driverClassName  
 52.11 dBConnectionPoolModBConnectionPoolInfo-connectionArgs  
 52.12 dBConnectionPoolModBConnectionPoolInfo-initCapacity  
 52.13 dBConnectionPoolModBConnectionPoolInfo-maxCapacity  
 52.14 dBConnectionPoolModBConnectionPoolInfo-incrementRate  
 52.15 dBConnectionPoolModBConnectionPoolInfo-maxIdleTime  
 52.17 dBConnectionPoolModBConnectionPoolInfo-dynamicIncrement  
 52.18 dBConnectionPoolModBConnectionPoolInfo-connectionTimeOut  
 52.19 dBConnectionPoolModBConnectionPoolInfo-loginDelay  
 52.20 dBConnectionPoolModBConnectionPoolInfo-closeDelay  
 52.21 dBConnectionPoolModBConnectionPoolInfo-closeLongActiveConnection  
 52.22 dBConnectionPoolModBConnectionPoolInfo-maxActiveTime  
 52.23 dBConnectionPoolModBConnectionPoolInfo-maxUseCount  
 52.24 dBConnectionPoolModBConnectionPoolInfo-checkQuery  
 52.26 dBConnectionPoolMomin  
 52.28 dBConnectionPoolMomax  
 52.30 dBConnectionPoolMostep  
 52.31 dBConnectionPoolModBConnectionPoolInfo-maxAliveTime  
 52.33 dBConnectionPoolMomaxIdleTime  
 52.35 dBConnectionPoolMomaxAliveTime  
 52.37 dBConnectionPoolModynamicIncrement  
 52.38 dBConnectionPoolMogetConnectionTimeout  
 52.39 dBConnectionPoolMocloseLongActiveConnection  
 52.40 dBConnectionPoolMomaxActiveTime  
 52.42 dBConnectionPoolMomaxUseCount  
 52.43 dBConnectionPoolMotroubles  
 52.44 dBConnectionPoolMoownTroubles

52.101 dBConnectionPoolMoactiveThreadCount-count  
 52.111 dBConnectionPoolMoblockThreadCount-count  
 52.121 dBConnectionPoolMoallThreadCount-count  
 53.1 threadPoolMoobjectName  
 53.3 threadPoolMomin  
 53.5 threadPoolMomax  
 53.7 threadPoolMostep  
 53.9 threadPoolMomaxIdleTime  
 53.11 threadPoolMomaxQueue  
 53.13 threadPoolMomaxWaitQueue  
 53.14 threadPoolMomaxThreadActiveTime  
 53.15 threadPoolMonotifyThreshold  
 53.16 threadPoolMorestartThreshold  
 53.17 threadPoolMotroubles  
 53.18 threadPoolMoownTroubles  
 53.101 threadPoolMoactiveThreadCount-count  
 53.111 threadPoolMoblockThreadCount-count  
 53.121 threadPoolMoallThreadCount-count  
 53.131 threadPoolMomaxThreadCount-count  
 53.141 threadPoolMowaitQueueCount-count  
 54.1 webEngineMoobjectName  
 54.2 webEngineMocontextGroups  
 54.3 webEngineMoconfigInfo  
 54.4 webEngineMoserverStatus  
 54.5 webEngineModBConnectionPool  
 54.6 webEngineMocontextGroupNames  
 54.7 webEngineMosessionContainer  
 54.8 webEngineMowebtConnectionGroup  
 54.9 webEngineMoconfiguration  
 54.11 webEngineMocheckThreadPool  
 54.13 webEngineMocheckClassReload  
 54.15 webEngineMocheckSession  
 54.17 webEngineMocheckDbConnectionPool  
 54.18 webEngineMotroubles  
 54.19 webEngineMoownTroubles  
 54.101 webEngineMofreeMemory-count  
 54.111 webEngineMototalMemory-count  
 55.1 webListenerMoobjectName  
 55.2 webListenerMothreadPools  
 55.3 webListenerMotype  
 55.4 webListenerMoport  
 55.6 webListenerMoreadTimeout  
 55.8 webListenerMoreconnectTimeout  
 55.10 webListenerMopostdataReadTimeout  
 55.11 webListenerMotroubles  
 55.12 webListenerMoownTroubles  
 56.1 webtConnectionGroupMoobjectName  
 56.2 webtConnectionGroupMotroubles  
 56.3 webtConnectionGroupMoownTroubles  
 56.101 webtConnectionGroupMototalConnectionCount-count  
 56.111 webtConnectionGroupMofreeConnectionCount-count  
 56.121 webtConnectionGroupMousedConnectionCount-count  
 61.1 jMSClientResourceobjectName  
 61.2 jMSClientResourcehostAddress  
 61.3 jMSClientResourceport  
 61.4 jMSClientResourcejMSConnectionResourceNames  
 61.6 jMSClientResourcecnamePartString  
 61.7 jMSClientResourcectroubles  
 61.8 jMSClientResourcecownTroubles

61.101 jMSClientResourceconnectionCount-count  
 62.1 jMSQueueConnectionFactoryResourceobjectName  
 62.3 jMSQueueConnectionFactoryResourceName  
 62.4 jMSQueueConnectionFactoryResourceTroubles  
 62.5 jMSQueueConnectionFactoryResourceownTroubles  
 63.1 jMSQueueDestinationResourceobjectName  
 63.2 jMSQueueDestinationResourceName  
 63.3 jMSQueueDestinationResourceexportName  
 63.4 jMSQueueDestinationResourceType  
 63.8 jMSQueueDestinationResourcedestination  
 63.9 jMSQueueDestinationResourcejMSConsumerResourceNames  
 63.10 jMSQueueDestinationResourceremainingMessages  
 63.11 jMSQueueDestinationResourceTroubles  
 63.12 jMSQueueDestinationResourceownTroubles  
 63.101 jMSQueueDestinationResourcemessageCount-count  
 63.111 jMSQueueDestinationResourcependingMessageCount-count  
 63.121 jMSQueueDestinationResourceexpiredMessageCount-count  
 63.122 jMSQueueDestinationResourcemessageWaitTime-count  
 63.123 jMSQueueDestinationResourcemessageWaitTime-maxTime  
 63.124 jMSQueueDestinationResourcemessageWaitTime-minTime  
 63.125 jMSQueueDestinationResourcemessageWaitTime-totalTime  
 63.131 jMSQueueDestinationResourcesendTime-count  
 63.132 jMSQueueDestinationResourcesendTime-maxTime  
 63.133 jMSQueueDestinationResourcesendTime-minTime  
 63.134 jMSQueueDestinationResourcesendTime-totalTime  
 64.1 jMSDurableSubscriberResourceobjectName  
 64.2 jMSDurableSubscriberResourceName  
 64.3 jMSDurableSubscriberResourceclientID  
 64.5 jMSDurableSubscriberResourceremainingMessages  
 64.6 jMSDurableSubscriberResourceselector  
 64.7 jMSDurableSubscriberResourcejMSConsumerResourceName  
 64.8 jMSDurableSubscriberResourceTroubles  
 64.9 jMSDurableSubscriberResourceownTroubles  
 65.1 jMSTopicConnectionFactoryResourceobjectName  
 65.3 jMSTopicConnectionFactoryResourceName  
 65.4 jMSTopicConnectionFactoryResourceTroubles  
 65.5 jMSTopicConnectionFactoryResourceownTroubles  
 66.1 jMSTopicDestinationResourceobjectName  
 66.2 jMSTopicDestinationResourceName  
 66.3 jMSTopicDestinationResourceexportName  
 66.4 jMSTopicDestinationResourceType  
 66.6 jMSTopicDestinationResourcejMSDurableSubscriberResourceNames  
 66.8 jMSTopicDestinationResourcedestination  
 66.9 jMSTopicDestinationResourcejMSConsumerResourceNames  
 66.10 jMSTopicDestinationResourceTroubles  
 66.11 jMSTopicDestinationResourceownTroubles  
 66.101 jMSTopicDestinationResourcemessageCount-count  
 66.111 jMSTopicDestinationResourcependingMessageCount-count  
 66.121 jMSTopicDestinationResourceexpiredMessageCount-count  
 66.122 jMSTopicDestinationResourcemessageWaitTime-count  
 66.123 jMSTopicDestinationResourcemessageWaitTime-maxTime  
 66.124 jMSTopicDestinationResourcemessageWaitTime-minTime  
 66.125 jMSTopicDestinationResourcemessageWaitTime-totalTime  
 66.131 jMSTopicDestinationResourcesendTime-count  
 66.132 jMSTopicDestinationResourcesendTime-maxTime  
 66.133 jMSTopicDestinationResourcesendTime-minTime  
 66.134 jMSTopicDestinationResourcesendTime-totalTime  
 71.1 threadPoolobjectName  
 71.2 threadPoolthreadOperationInfo

71.4 threadPoolmax  
 71.6 threadPoolperiod  
 71.7 threadPooltroubles  
 71.8 threadPoolownTroubles  
 77.1 jEUSManagerobjectName  
 77.2 jEUSManagerserverVersion  
 77.3 jEUSManagerserverVendor  
 77.4 jEUSManagerjavaVMs  
 77.5 jEUSManagerjeusServices  
 77.6 jEUSManagerj2eeServers  
 77.9 jEUSManagernodesFromDescriptor  
 77.10 jEUSManageraliveNodeNames  
 77.11 jEUSManagerjeusHome  
 77.12 jEUSManagerpID  
 77.13 jEUSManagertroubles  
 77.14 jEUSManagerownTroubles  
 77.15 jEUSManagerj2eeServerNames  
 81.1 webServerInfoobjectName  
 81.2 webServerInfonodeInfo  
 81.3 webServerInfosvrAllInfo  
 81.4 webServerInfotroubles  
 81.5 webServerInfoownTroubles  
 81.101 webServerInfosvrCount-count  
 81.111 webServerInfoexecCount-count  
 81.121 webServerInfoavgTime-count  
 81.122 webServerInfoavgTime-maxTime  
 81.123 webServerInfoavgTime-minTime  
 81.124 webServerInfoavgTime-totalTime  
 92.1 externalWebtDataSourceobjectName  
 92.2 externalWebtDataSourceetype  
 92.3 externalWebtDataSourceport  
 92.4 externalWebtDataSourceewbtProperties  
 92.5 externalWebtDataSourceexportName  
 92.6 externalWebtDataSourcehostAddr  
 92.8 externalWebtDataSourcelevel  
 92.9 externalWebtDataSourceetroubles  
 92.10 externalWebtDataSourceewbtownTroubles  
 92.101 externalWebtDataSourcecreateCount-count  
 92.111 externalWebtDataSourcecloseCount-count  
 92.121 externalWebtDataSourcepoolSize-upperBound  
 92.122 externalWebtDataSourcepoolSize-lowerBound  
 92.123 externalWebtDataSourcepoolSize-highWaterMark  
 92.124 externalWebtDataSourcepoolSize-lowWaterMark  
 92.125 externalWebtDataSourcepoolSize-current  
 92.131 externalWebtDataSourcefreePoolSize-upperBound  
 92.132 externalWebtDataSourcefreePoolSize-lowerBound  
 92.133 externalWebtDataSourcefreePoolSize-highWaterMark  
 92.134 externalWebtDataSourcefreePoolSize-lowWaterMark  
 92.135 externalWebtDataSourcefreePoolSize-current  
 92.141 externalWebtDataSourcewaitingThreadCount-highWaterMark  
 92.142 externalWebtDataSourcewaitingThreadCount-lowWaterMark  
 92.143 externalWebtDataSourcewaitingThreadCount-current  
 92.151 externalWebtDataSourceereConnectCount-count  
 92.161 externalWebtDataSourceetotalConnectionCount-count  
 92.171 externalWebtDataSourcefreeConnectionCount-count  
 92.181 externalWebtDataSourceactiveConnectionCount-count  
 101.1 subjectMoobjectName  
 101.2 subjectMosubjectNames  
 101.3 subjectMotroubles

```

101.4 subjectMoownTroubles
102.1 securityDomainMoobjectName
102.2 securityDomainModomainName
102.3 securityDomainMopolicys
102.4 securityDomainMosubjects
102.5 securityDomainMotroubles
102.6 securityDomainMoownTroubles
102.7 securityDomainModescription
103.1 policyMoobjectName
103.2 policyMopolicyIds
103.3 policyMotroubles
103.4 policyMoownTroubles
104.1 securityMoobjectName
104.2 securityMocurrentDomain
104.3 securityMosecurityDomains
104.4 securityMotroubles
104.5 securityMoownTroubles
105.1 jMSEngineMojMSResource
105.2 jMSEngineMoengineName
105.3 jMSEngineMoobjectName
105.4 jMSEngineMotroubles
105.5 jMSEngineMoownTroubles

```

## A.3. TMAX-JEUS8.0-MIB.mib

```

TMAX-JEUS-MIB DEFINITIONS ::= BEGIN
IMPORTS

    enterprises, Counter
        FROM RFC1155-SMI
    OBJECT-TYPE
        FROM RFC-1212
    DisplayString
        FROM RFC1213-MIB
    TRAP-TYPE
        FROM RFC-1215;
tmax OBJECT IDENTIFIER ::= { enterprises 14586 }

jeus OBJECT IDENTIFIER ::= { tmax 100 }

-----
-- SNMP monitoring objects in each MBeans
-----

-----
-- j2EEDomain
-----

j2EEDomain OBJECT IDENTIFIER
    ::= { jeus 2 }

j2EEDomainobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory

```

```

DESCRIPTION
    "JMX-standard MBean object name"
    ::= { j2EEDomain 1 }
j2EEDomainServers OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the J2EE Servers that this domain includes"
    ::= { j2EEDomain 2 }

-----
-- j2EEServer
-----

j2EEServer OBJECT IDENTIFIER
    ::= { jeus 3 }

j2EEServerObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { j2EEServer 1 }
j2EEServerServerVersion OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the version of JEUS that is being used"
    ::= { j2EEServer 2 }
j2EEServerServerVendor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the J2EE platform vendor of this J2EE Server"
    ::= { j2EEServer 3 }
j2EEServerJavaVMs OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the JVMs on which J2EE Server is running"
    ::= { j2EEServer 4 }
j2EEServerDeployedObjects OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the J2EE Modules that are deployed on this J2EE Server"
    ::= { j2EEServer 5 }
j2EEServerResources OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the J2EE Resources that can be used in this J2EE Server"

```

```

::= { j2EEServer 6 }
j2EEServerjeusServices OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { j2EEServer 8 }
j2EEServerengines OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { j2EEServer 9 }
j2EEServerenginesFromDescriptor OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { j2EEServer 10 }
j2EEServerdistributedModules OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { j2EEServer 15 }
j2EEServernodeName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { j2EEServer 17 }
j2EEServerappPaths OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { j2EEServer 18 }

-----
-- jVM
-----

jVM OBJECT IDENTIFIER
    ::= { jeus 4 }

jVMObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jVM 1 }
jVMjavaVersion OBJECT-TYPE

```



```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the system property value of java.version"
 ::= { jVM 2 }
jVMjavaVendor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the system property value of java.vendor"
    ::= { jVM 3 }
jVMnode OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the host name and ip address of the machine on which this JVM is running"
    ::= { jVM 4 }
jVMoSName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the system property value of os.name"
    ::= { jVM 6 }
jVMoSVersion OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the system property value of os.version"
    ::= { jVM 7 }
jVMallProperties OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the all system property values"
    ::= { jVM 8 }
jVMheapSize-upperBound OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jVM 101 }
jVMheapSize-lowerBound OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jVM 102 }
jVMheapSize-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory

```

```

DESCRIPTION
    ""

    ::= { jVM 103 }
jVMheapSize-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jVM 104 }
jVMheapSize-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jVM 105 }
jVMupTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jVM 111 }
jVMtotalSize-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jVM 121 }
jVMtotalSize-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jVM 122 }
jVMtotalSize-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jVM 123 }

-----
-- j2EEApplication
-----

j2EEApplication OBJECT IDENTIFIER
    ::= { jeus 6 }

j2EEApplicationObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

```

```

 ::= { j2EEApplication 1 }
j2EEApplicationdeploymentDescriptor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 2 }
j2EEApplicationserver OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 3 }
j2EEApplicationmodules OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 4 }
j2EEApplicationmoduleType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 5 }
j2EEApplicationapplicationType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 6 }
j2EEApplicationjeusDeploymentPlan OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 7 }
j2EEApplicationtargetModuleID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { j2EEApplication 8 }

-----
-- appClientModule
-----

appClientModule OBJECT IDENTIFIER
    ::= { jeus 8 }

appClientModuleobjectName OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

::= { appClientModule 1 }
appClientModuledeploymentDescriptor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 2 }
appClientModuleserver OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 3 }
appClientModulejavaVMs OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 4 }
appClientModuleapplicationType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 5 }
appClientModulemoduleType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 6 }
appClientModulejeusDeploymentPlan OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 7 }
appClientModuletargetModuleID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { appClientModule 8 }

-----
-- eJBModule
-----

```

```

eJBModule OBJECT IDENTIFIER
    ::= { jeus 9 }

eJBModuleobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { eJBModule 1 }

eJBModuledeploymentDescriptor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "XML deployment descriptor of this module"
    ::= { eJBModule 2 }

eJBModuleserver OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the name of the J2EE Server(JEUS container) on which this module is deployed"
    ::= { eJBModule 3 }

eJBModulejavaVMs OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the JVMs on which this module is running"
    ::= { eJBModule 4 }

eJBModuleejbs OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the ejb components(EntityBean, StatefullSessionBean, or
        StatelessSessionBean) that this EJB Module includes"
    ::= { eJBModule 5 }

eJBModuleejbCount OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { eJBModule 6 }

eJBModuleclientViewPath OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { eJBModule 7 }

eJBModulejeusDeploymentPlan OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION

```

```

    ""
    ::= { eJBModule 8 }
eJBModuletargetModuleID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { eJBModule 9 }
eJBModulemoduleType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { eJBModule 10 }
eJBModuleapplicationType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { eJBModule 11 }

-----
-- messageDrivenBean
-----

messageDrivenBean OBJECT IDENTIFIER
    ::= { jeus 11 }

messageDrivenBeanobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { messageDrivenBean 1 }
messageDrivenBeancreateCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 101 }
messageDrivenBeanremoveCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 111 }
messageDrivenBeanrequestCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 121 }

```

```

messageDrivenBeancommittedCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 131 }
messageDrivenBeanrolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 141 }
messageDrivenBeantimeoutRolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 151 }
messageDrivenBeanmessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 161 }
messageDrivenBeanactiveEJBBeanCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 171 }
messageDrivenBeanactiveEJBBeanCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 172 }
messageDrivenBeanactiveEJBBeanCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 173 }
messageDrivenBeantotalEJBBeanCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { messageDrivenBean 181 }
messageDrivenBeantotalEJBBeanCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only

```

```

STATUS mandatory
DESCRIPTION
    ""

::= { messageDrivenBean 182 }
messageDrivenBeantotalEJBBeanCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { messageDrivenBean 183 }

-----
-- entityBean
-----

entityBean OBJECT IDENTIFIER
    ::= { jeus 12 }

entityBeanobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { entityBean 1 }
entityBeancreateCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the beans that is created by create() method"
    ::= { entityBean 101 }
entityBeanremoveCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the beans that is removed by remove() method"
    ::= { entityBean 111 }
entityBeanrequestCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the requests on this bean"
    ::= { entityBean 121 }
entityBeancommittedCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that is committed"
    ::= { entityBean 131 }
entityBeanrolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION

```



```

        "the number of the transactions that is rollbacked"
        ::= { entityBean 141 }
entityBeantimeoutRolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that is rollbacked by timeout"
        ::= { entityBean 151 }
entityBeanreadyCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the bean instances that are READY state"
        ::= { entityBean 161 }
entityBeanreadyCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are READY state"
        ::= { entityBean 162 }
entityBeanreadyCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are READY state"
        ::= { entityBean 163 }
entityBeanpooledCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the bean instances that are POOLED state"
        ::= { entityBean 171 }
entityBeanpooledCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are POOLED state"
        ::= { entityBean 172 }
entityBeanpooledCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are POOLED state"
        ::= { entityBean 173 }
entityBeanautoRemovedEJBObjectCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the bean instances that are removed automatically when they are passivated"
        ::= { entityBean 181 }
entityBeantotalEJBBeanCount-highWaterMark OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the bean instances that are in the bean pool of this bean"
::= { entityBean 191 }
entityBeantotalEJBBeanCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are in the bean pool of this bean"
        ::= { entityBean 192 }
entityBeantotalEJBBeanCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are in the bean pool of this bean"
        ::= { entityBean 193 }
entityBeanactiveEJBBeanCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the bean instances that are ACTIVE state"
        ::= { entityBean 201 }
entityBeanactiveEJBBeanCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are ACTIVE state"
        ::= { entityBean 202 }
entityBeanactiveEJBBeanCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are ACTIVE state"
        ::= { entityBean 203 }
entityBeantotalThreadCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the threads that are in thread pool of this bean"
        ::= { entityBean 211 }
entityBeantotalThreadCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the threads that are in thread pool of this bean"
        ::= { entityBean 212 }
entityBeantotalThreadCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory

```

```

DESCRIPTION
    "the current number of the threads that are in thread pool of this bean"
    ::= { entityBean 213 }
entityBeanactiveThreadCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the threads that are being used in thread pool of this bean"
        ::= { entityBean 221 }
entityBeanactiveThreadCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the threads that are being used in thread pool of this bean"
        ::= { entityBean 222 }
entityBeanactiveThreadCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the threads that are being used in thread pool of this bean"
        ::= { entityBean 223 }
entityBeantotalEJBObjectCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the objects that are in connection pool of this bean"
        ::= { entityBean 231 }
entityBeantotalEJBObjectCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the objects that are in connection pool of this bean"
        ::= { entityBean 232 }
entityBeantotalEJBObjectCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the objects that are in connection pool of this bean"
        ::= { entityBean 233 }
entityBeanactiveEJBObjectCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the objects that are being used in connection pool of this bean"
        ::= { entityBean 241 }
entityBeanactiveEJBObjectCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the objects that are being used in connection pool of this bean"
        ::= { entityBean 242 }

```

```

entityBeanactiveEJBObjectCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the objects that are being used in connection pool of this bean"
    ::= { entityBean 243 }
entityBeanpassiveCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the bean instances that are passivated"
    ::= { entityBean 251 }
entityBeanpassiveCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are passivated"
    ::= { entityBean 252 }
entityBeanpassiveCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are passivated"
    ::= { entityBean 253 }

-----
-- statefulSessionBean
-----

statefulSessionBean OBJECT IDENTIFIER
    ::= { jeus 14 }

statefulSessionBeanobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { statefulSessionBean 1 }
statefulSessionBeancreateCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the beans that is created by create() method"
    ::= { statefulSessionBean 101 }
statefulSessionBeanremoveCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the beans that is removed by remove() method"
    ::= { statefulSessionBean 111 }
statefulSessionBeanrequestCount-count OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the requests on this bean"
::= { statefulSessionBean 121 }
statefulSessionBeancommittedCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the transactions that is committed"
::= { statefulSessionBean 131 }
statefulSessionBeanrolledbackCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the transactions that is rolledback"
::= { statefulSessionBean 141 }
statefulSessionBeantimeoutRolledbackCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the transactions that is rolledback by timeout"
::= { statefulSessionBean 151 }
statefulSessionBeanmethodReadyCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the beans that are METHOD-READY state"
::= { statefulSessionBean 161 }
statefulSessionBeanmethodReadyCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the beans that are METHOD-READY state"
::= { statefulSessionBean 162 }
statefulSessionBeanmethodReadyCount-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the beans that are METHOD-READY state"
::= { statefulSessionBean 163 }
statefulSessionBeanpassiveCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the bean instances that are passivated"
::= { statefulSessionBean 171 }
statefulSessionBeanpassiveCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION

```

```

        "the lowest number of the bean instances that are passivated"
        ::= { statefulSessionBean 172 }
statefulSessionBeanpassiveCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are passivated"
        ::= { statefulSessionBean 173 }
statefulSessionBeanautoRemovedEJBObjectCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the bean instances that are removed automatically when they are passivated"
        ::= { statefulSessionBean 181 }
statefulSessionBeantotalEJBBeanCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the bean instances that are in the bean pool of this bean"
        ::= { statefulSessionBean 191 }
statefulSessionBeantotalEJBBeanCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are in the bean pool of this bean"
        ::= { statefulSessionBean 192 }
statefulSessionBeantotalEJBBeanCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are in the bean pool of this bean"
        ::= { statefulSessionBean 193 }
statefulSessionBeanactiveEJBBeanCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the bean instances that are ACTIVE state"
        ::= { statefulSessionBean 201 }
statefulSessionBeanactiveEJBBeanCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the bean instances that are ACTIVE state"
        ::= { statefulSessionBean 202 }
statefulSessionBeanactiveEJBBeanCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the bean instances that are ACTIVE state"
        ::= { statefulSessionBean 203 }
statefulSessionBeantotalThreadCount-highWaterMark OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the threads that are in thread pool of this bean"
::= { statefulSessionBean 211 }
statefulSessionBeantotalThreadCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the threads that are in thread pool of this bean"
::= { statefulSessionBean 212 }
statefulSessionBeantotalThreadCount-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the threads that are in thread pool of this bean"
::= { statefulSessionBean 213 }
statefulSessionBeanactiveThreadCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the threads that are being used in thread pool of this bean"
::= { statefulSessionBean 221 }
statefulSessionBeanactiveThreadCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the threads that are being used in thread pool of this bean"
::= { statefulSessionBean 222 }
statefulSessionBeanactiveThreadCount-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the threads that are being used in thread pool of this bean"
::= { statefulSessionBean 223 }
statefulSessionBeantotalEJBObjectCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the objects that are in connection pool of this bean"
::= { statefulSessionBean 231 }
statefulSessionBeantotalEJBObjectCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the objects that are in connection pool of this bean"
::= { statefulSessionBean 232 }
statefulSessionBeantotalEJBObjectCount-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory

```

```

DESCRIPTION
    "the current number of the objects that are in connection pool of this bean"
    ::= { statefulSessionBean 233 }
statefulSessionBeanactiveEJBObjectCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the objects that are being used in connection pool of this bean"
        ::= { statefulSessionBean 241 }
statefulSessionBeanactiveEJBObjectCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the objects that are being used in connection pool of this bean"
        ::= { statefulSessionBean 242 }
statefulSessionBeanactiveEJBObjectCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the objects that are being used in connection pool of this bean"
        ::= { statefulSessionBean 243 }
statefulSessionBeanfileDBSizeCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the biggest size of the file that contains the beans that is passivated"
        ::= { statefulSessionBean 251 }
statefulSessionBeanfileDBSizeCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the smallest size of the file that contains the beans that is passivated"
        ::= { statefulSessionBean 252 }
statefulSessionBeanfileDBSizeCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current size of the file that contains the beans that is passivated"
        ::= { statefulSessionBean 253 }

-----
-- statelessSessionBean
-----

statelessSessionBean OBJECT IDENTIFIER
    ::= { jeus 15 }

statelessSessionBeanobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"

```



```

 ::= { statelessSessionBean 1 }
statelessSessionBeancreateCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the beans that is created by create() method"
 ::= { statelessSessionBean 101 }
statelessSessionBeanremoveCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the beans that is removed by remove() method"
 ::= { statelessSessionBean 111 }
statelessSessionBeanrequestCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the requests on this bean"
 ::= { statelessSessionBean 121 }
statelessSessionBeancommittedCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that is committed"
 ::= { statelessSessionBean 131 }
statelessSessionBeanrolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that is rollbacked"
 ::= { statelessSessionBean 141 }
statelessSessionBeantimeoutRolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that is rollbacked by timeout"
 ::= { statelessSessionBean 151 }
statelessSessionBeanmethodReadyCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the beans that are METHOD-READY state"
 ::= { statelessSessionBean 161 }
statelessSessionBeanmethodReadyCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the beans that are METHOD-READY state"
 ::= { statelessSessionBean 162 }
statelessSessionBeanmethodReadyCount-current OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the beans that are METHOD-READY state"
::= { statelessSessionBean 163 }
statelessSessionBeantotalEJBBeanCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the bean instances that are in the bean pool of this bean"
::= { statelessSessionBean 171 }
statelessSessionBeantotalEJBBeanCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the bean instances that are in the bean pool of this bean"
::= { statelessSessionBean 172 }
statelessSessionBeantotalEJBBeanCount-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the bean instances that are in the bean pool of this bean"
::= { statelessSessionBean 173 }
statelessSessionBeanactiveEJBBeanCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the bean instances that are ACTIVE state"
::= { statelessSessionBean 181 }
statelessSessionBeanactiveEJBBeanCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the bean instances that are ACTIVE state"
::= { statelessSessionBean 182 }
statelessSessionBeanactiveEJBBeanCount-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the bean instances that are ACTIVE state"
::= { statelessSessionBean 183 }
statelessSessionBeantotalThreadCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the threads that are in thread pool of this bean"
::= { statelessSessionBean 191 }
statelessSessionBeantotalThreadCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION

```

```

        "the lowest number of the threads that are in thread pool of this bean"
        ::= { statelessSessionBean 192 }
statelessSessionBeantotalCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the threads that are in thread pool of this bean"
        ::= { statelessSessionBean 193 }
statelessSessionBeanactiveThreadCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the threads that are being used in thread pool of this bean"
        ::= { statelessSessionBean 201 }
statelessSessionBeanactiveThreadCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the threads that are being used in thread pool of this bean"
        ::= { statelessSessionBean 202 }
statelessSessionBeanactiveThreadCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the threads that are being used in thread pool of this bean"
        ::= { statelessSessionBean 203 }

-----
-- webModule
-----

webModule OBJECT IDENTIFIER
    ::= { jeus 16 }

webModuleObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
        ::= { webModule 1 }
webModuledeploymentDescriptor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "XML deployment descriptor of this module"
        ::= { webModule 2 }
webModuleserver OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the name of the J2EE Server(JEUS container) on which this module is deployed"
        ::= { webModule 3 }

```

```

webModulejavaVms OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the JVMs on which this module is running"
    ::= { webModule 4 }
webModuleservlets OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the Servlets that this Web Module includes"
    ::= { webModule 5 }
webModulecontextGroupName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the context group on which this Web Module is deployed"
    ::= { webModule 6 }
webModulecontextGroup OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the names of the context group on which this Web Module is deployed"
    ::= { webModule 7 }
webModulerealDocBase OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webModule 8 }
webModulejeusDeploymentPlan OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webModule 9 }
webModuletargetModuleID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webModule 10 }
webModulemoduleType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webModule 11 }
webModuleapplicationType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only

```

```

STATUS mandatory
DESCRIPTION
""

::= { webModule 12 }
webModuleautoReload OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-write
STATUS mandatory
DESCRIPTION
""

::= { webModule 13 }
webModulerequestCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"the number of the requests on this web module"

::= { webModule 101 }
webModuleallSessionsSize-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"the number of the all sessions that is registered on the session server that this Web Module
is using"

::= { webModule 111 }
webModuleactiveSessionsSize-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"the number of the active sessions that is registered on the session server that this Web
Module is using"

::= { webModule 121 }
webModulepassivateSessionsSize-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"the number of the passivated sessions that is registered on the session server that this Web
Module is using"

::= { webModule 131 }
webModulelocalSessionsSize-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"the number of the local sessions that is not related to the session server that this Web
Module is using"

::= { webModule 141 }
webModuleprocessingTime-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
""

::= { webModule 151 }

```

-----

```

-- servlet
-----

servlet OBJECT IDENTIFIER
 ::= { jeus 17 }

servletObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { servlet 1 }
servletServletInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the general information of the servlets that is deployed"
    ::= { servlet 2 }
servletAverageExecutionTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the average execution time of the servlets that is deplyed in milliseconds"
    ::= { servlet 3 }
servletServiceTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of times that Servlet serves"
    ::= { servlet 101 }
servletServiceTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the longest time that Servlet serves"
    ::= { servlet 102 }
servletServiceTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the shortest time that Servlet serves"
    ::= { servlet 103 }
servletServiceTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total time that Servlet serves"
    ::= { servlet 104 }

-----
-- resourceAdapterModule
-----

```

```

resourceAdapterModule OBJECT IDENTIFIER
    ::= { jeus 18 }

resourceAdapterModuleobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 1 }
resourceAdapterModuledeploymentDescriptor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 2 }
resourceAdapterModuleserver OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 3 }
resourceAdapterModulejavaVMs OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 4 }
resourceAdapterModulemoduleType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 6 }
resourceAdapterModuleapplicationType OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 7 }
resourceAdapterModulejeusDeploymentPlan OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { resourceAdapterModule 8 }
resourceAdapterModuletargetModuleID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

```

```

::= { resourceAdapterModule 9 }
resourceAdapterModulemin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapterModule 10 }
resourceAdapterModulemax OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapterModule 11 }
resourceAdapterModulestep OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapterModule 12 }
resourceAdapterModulekeepAliveTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapterModule 13 }
resourceAdapterModulereleaseTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapterModule 14 }
resourceAdapterModulerejectTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapterModule 15 }

-----
-- resourceAdapter
-----

resourceAdapter OBJECT IDENTIFIER
    ::= { jeus 19 }

resourceAdapterobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { resourceAdapter 1 }

```



```

-----
-- javaMailResource
-----

javaMailResource OBJECT IDENTIFIER
    ::= { jeus 21 }

javaMailResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { javaMailResource 1 }
javaMailResourceproperty OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { javaMailResource 2 }

-----
-- jCAResource
-----

jCAResource OBJECT IDENTIFIER
    ::= { jeus 22 }

jCAResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jCAResource 1 }
jCAResourcecMInfo OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jCAResource 4 }

-----
-- jCAConnectionFactory
-----

jCAConnectionFactory OBJECT IDENTIFIER
    ::= { jeus 23 }

jCAConnectionFactoryobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jCAConnectionFactory 1 }
jCAConnectionFactorycMInfo OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

 ::= { jCAConnectionFactory 2 }
jCAConnectionFactorymin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 3 }
jCAConnectionFactorymax OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 4 }
jCAConnectionFactorymaxWaiter OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 5 }
jCAConnectionFactorymaxDisposableCount OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 6 }
jCAConnectionFactorywaitTrial OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 7 }
jCAConnectionFactorywaitingTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 8 }
jCAConnectionFactorypooledTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jCAConnectionFactory 9 }
jCAConnectionFactorydissociationtimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory

```

```

DESCRIPTION
    ""

    ::= { jCAConnectionFactory 10 }
jCAConnectionFactoryinvalidationtimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jCAConnectionFactory 11 }
jCAConnectionFactoryskipMatching OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jCAConnectionFactory 13 }
jCAConnectionFactoryuseWrapper OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jCAConnectionFactory 14 }

-----
-- jCAManagedConnectionFactory
-----

jCAManagedConnectionFactory OBJECT IDENTIFIER
    ::= { jeus 24 }

jCAManagedConnectionFactoryobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jCAManagedConnectionFactory 1 }

-----
-- jDBCResource
-----

jDBCResource OBJECT IDENTIFIER
    ::= { jeus 25 }

jDBCResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"

    ::= { jDBCResource 1 }
jDBCResourcejdbcDataSources OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION

```

```

    "JMX-standard object names of JDBC Data Sources that is related to this JDBC Resource"
    ::= { jdbcResource 2 }
jdbcResourcecPInfo OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jdbcResource 3 }
jdbcResourceconnectionPools-createCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the connected connections in the connection pool of each JDBC Data Sources
that is related to this JDBC Resource"
    ::= { jdbcResource 101 }
jdbcResourceconnectionPools-closeCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the disconnected connections in the connection pool of each JDBC Data Sources
that is related to this JDBC Resource"
    ::= { jdbcResource 111 }
jdbcResourceconnectionPools-poolSize-upperBound OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the max value that is configured to be upper bound of the pool size of the connection pool
of each JDBC Data Sources that is related to this JDBC Resource"
    ::= { jdbcResource 121 }
jdbcResourceconnectionPools-poolSize-lowerBound OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the min value that is configured to be lower bound of the pool size of the connection pool
of each JDBC Data Sources that is related to this JDBC Resource"
    ::= { jdbcResource 122 }
jdbcResourceconnectionPools-poolSize-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest value of the pool size of the connection pool of each JDBC Data Sources that is
related to this JDBC Resource"
    ::= { jdbcResource 123 }
jdbcResourceconnectionPools-poolSize-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest value of the pool size of the connection pool of each JDBC Data Sources that is
related to this JDBC Resource"
    ::= { jdbcResource 124 }
jdbcResourceconnectionPools-poolSize-current OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current value of the pool size of the connection pool of each JDBC Data Sources that is
related to this JDBC Resource"
::= { jdbcResource 125 }
jdbcResourceconnectionPools-freePoolSize-upperBound OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the upper bound of the free connections in the connection pool of each JDBC Data Sources
that is related to this JDBC Resource (It is equal to the connectionPools-PoolSize-UpperBound)"
::= { jdbcResource 131 }
jdbcResourceconnectionPools-freePoolSize-lowerBound OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lower bound of the free connections in the connection pool of each JDBC Data Sources
that is related to this JDBC Resource (It is set to be 0)"
::= { jdbcResource 132 }
jdbcResourceconnectionPools-freePoolSize-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the free connections in the connection pool of each JDBC Data Source
that is related to this JDBC Resource"
::= { jdbcResource 133 }
jdbcResourceconnectionPools-freePoolSize-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the lowest number of the free connections in the connection pool of each JDBC Data Source
that is related to this JDBC Resource"
::= { jdbcResource 134 }
jdbcResourceconnectionPools-freePoolSize-current OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the current number of the free connections in the connection pool of each JDBC Data Source
that is related to this JDBC Resource"
::= { jdbcResource 135 }
jdbcResourceconnectionPools-waitingThreadCount-highWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the highest number of the threads, which are waiting to get connections from the connection
pool of each JDBC Data Sources that is related to this JDBC Resource"
::= { jdbcResource 141 }
jdbcResourceconnectionPools-waitingThreadCount-lowWaterMark OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION

```

```

    "the lowest number of the threads, which are waiting to get connections from the connection
pool of each JDBC Data Sources that is related to this JDBC Resource"
    ::= { jdbcResource 142 }
jdbcResourceconnectionPools-waitingThreadCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the threads, which are waiting to get connections from the connection
pool of each JDBC Data Sources that is related to this JDBC Resource"
    ::= { jdbcResource 143 }
jdbcResourceconnectionPools-waitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the waiting time to get connection available in connection pool"
    ::= { jdbcResource 161 }
jdbcResourceconnectionPools-waitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum waiting time to get connection available in connection pool"
    ::= { jdbcResource 162 }
jdbcResourceconnectionPools-waitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum waiting time to get connection available in connection pool"
    ::= { jdbcResource 163 }
jdbcResourceconnectionPools-waitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total waiting time to get connection available in connection pool"
    ::= { jdbcResource 164 }
jdbcResourceconnectionPools-useTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the time to use connection"
    ::= { jdbcResource 171 }
jdbcResourceconnectionPools-useTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum time to use connection"
    ::= { jdbcResource 172 }
jdbcResourceconnectionPools-useTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum time to use connection"

```

```

::= { jdbcResource 173 }
jdbcResourceconnectionPools-useTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total time to use connection"
    ::= { jdbcResource 174 }
jdbcResourceconnectionPools-jdbcDataSource OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object name of JDBC datasource of each connectios in this connection pool"
    ::= { jdbcResource 181 }

-----
-- jdbcDataSource
-----

jdbcDataSource OBJECT IDENTIFIER
    ::= { jeus 26 }

jdbcDataSourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jdbcDataSource 1 }
jdbcDataSourcejdbcDriver OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object name of the JDBC Driver that is related to this JDBC Data Source"
    ::= { jdbcDataSource 2 }
jdbcDataSourceconfig OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the config information about this JDBC Data Source"
    ::= { jdbcDataSource 3 }
jdbcDataSourceecPInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jdbcDataSource 4 }
jdbcDataSourcecreateCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the connected connections to this JDBC Data Source"
    ::= { jdbcDataSource 101 }
jdbcDataSourcecloseCount-count OBJECT-TYPE

```

```

SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the number of the disconnected connections to this JDBC Data Source"
 ::= { jdbcDataSource 111 }
jdbcDataSourcepoolSize-upperBound OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the max value that is configured to be upper bound of the pool size of the connection pool
of this JDBC Data Source"
 ::= { jdbcDataSource 121 }
jdbcDataSourcepoolSize-lowerBound OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the min value that is configured to be lower bound of the pool size of the connection pool
of this JDBC Data Source"
 ::= { jdbcDataSource 122 }
jdbcDataSourcepoolSize-highWaterMark OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the highest value of the pool size of the connection pool of this JDBC Data Source"
 ::= { jdbcDataSource 123 }
jdbcDataSourcepoolSize-lowWaterMark OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the lowest value of the pool size of the connection pool of this JDBC Data Source"
 ::= { jdbcDataSource 124 }
jdbcDataSourcepoolSize-current OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the current value of the pool size of the connection pool of this JDBC Data Source"
 ::= { jdbcDataSource 125 }
jdbcDataSourcefreePoolSize-upperBound OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the upper bound of the free connections in the connection pool of this JDBC Data Source (It
is equal to the poolSize-UpperBound)"
 ::= { jdbcDataSource 131 }
jdbcDataSourcefreePoolSize-lowerBound OBJECT-TYPE
SYNTAX   DisplayString
ACCESS   read-only
STATUS   mandatory
DESCRIPTION
    "the lower bound of the free connections in the connection pool of this JDBC Data Source (It
is set to be 0)"
 ::= { jdbcDataSource 132 }

```



```

jDBCDataSourcefreePoolSize-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the free connections in the connection pool of this JDBC Data Source"
    ::= { jDBCDataSource 133 }
jDBCDataSourcefreePoolSize-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the free connections in the connection pool of this JDBC Data Source"
    ::= { jDBCDataSource 134 }
jDBCDataSourcefreePoolSize-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the free connections in the connection pool of this JDBC Data Source"
    ::= { jDBCDataSource 135 }
jDBCDataSourcewaitingThreadCount-highWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the highest number of the threads, which are waiting to get connections from the connection
pool of this JDBC Data Source"
    ::= { jDBCDataSource 141 }
jDBCDataSourcewaitingThreadCount-lowWaterMark OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the lowest number of the threads, which are waiting to get connections from the connection
pool of this JDBC Data Source"
    ::= { jDBCDataSource 142 }
jDBCDataSourcewaitingThreadCount-current OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the current number of the threads, which are waiting to get connections from the connection
pool of this JDBC Data Source"
    ::= { jDBCDataSource 143 }
jDBCDataSourceereConnectCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the reconnections to this JDBC Data Source"
    ::= { jDBCDataSource 151 }
jDBCDataSourcewaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total number of requests that are waiting to get connections from the connection pool of
this JDBC Data Source"

```

```

 ::= { jdbcDataSource 161 }
jdbcDataSourcewaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the longest time for waiting to get connections from the connection pool of this JDBC Data
Source"
 ::= { jdbcDataSource 162 }
jdbcDataSourcewaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the shortest time for waiting to get connections from the connection pool of this JDBC Data
Source"
 ::= { jdbcDataSource 163 }
jdbcDataSourcewaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total time for waiting to get connections from the connection pool of this JDBC Data
Source"
 ::= { jdbcDataSource 164 }
jdbcDataSourceuseTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total number of requests that use connections from the connection pool of this JDBC Data
Source"
 ::= { jdbcDataSource 171 }
jdbcDataSourceuseTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the longest time for using connections from the connection pool of this JDBC Data Source"
 ::= { jdbcDataSource 172 }
jdbcDataSourceuseTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the shortest time for using connections from the connection pool of this JDBC Data Source"
 ::= { jdbcDataSource 173 }
jdbcDataSourceuseTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total time for using connections from the connection pool of this JDBC Data Source"
 ::= { jdbcDataSource 174 }
jdbcDataSourcejdbcDataSource OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION

```

```

""
 ::= { jdbcDataSource 181 }

-----
-- jdbcDriver
-----

jdbcDriver OBJECT IDENTIFIER
 ::= { jeus 27 }

jdbcDriverObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jdbcDriver 1 }

-----
-- jmsResource
-----

jmsResource OBJECT IDENTIFIER
 ::= { jeus 28 }

jmsResourceObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jmsResource 1 }
jmsResourceclusterInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the information about the cluster of JMS server"
    ::= { jmsResource 3 }
jmsResourcejmsConnectionFactoryResourceNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the list of the names of JMS connection factory resources that are belong to this JMS
Resource"
    ::= { jmsResource 5 }
jmsResourcejmsDestinationResourceNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the list of the names of JMS destination resources that are belong to this JMS Resource"
    ::= { jmsResource 6 }
jmsResourcejmsClientResourceNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION

```

```

        "the list of the names of JMS client resources that are belong to this JMS Resource"
        ::= { jMSResource 7 }
jMSResourcefreeMemory OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

        ::= { jMSResource 9 }
jMSResourcetotalMemory OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

        ::= { jMSResource 10 }
jMSResourceconnections-sessions-messageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in each sessions"
        ::= { jMSResource 101 }
jMSResourceconnections-sessions-pendingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in each sessions without acknowledgement"
        ::= { jMSResource 111 }
jMSResourceconnections-sessions-expiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in each sessions"
        ::= { jMSResource 121 }
jMSResourceconnections-sessions-messageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
        ::= { jMSResource 131 }
jMSResourceconnections-sessions-messageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
        ::= { jMSResource 132 }
jMSResourceconnections-sessions-messageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
        ::= { jMSResource 133 }
jMSResourceconnections-sessions-messageWaitTime-totalTime OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the total period of time between when it creates message and when it delivers message"
::= { jMSResource 134 }
jMSResourceconnections-sessions-durableSubscriptionCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the durable subscribers that are created in each sessions"
::= { jMSResource 141 }
jMSResourceconnections-sessions-producers-destination OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "name of the destination to which each producers send messages"
::= { jMSResource 151 }
jMSResourceconnections-sessions-producers-messageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that are processed in each producers"
::= { jMSResource 161 }
jMSResourceconnections-sessions-producers-pendingMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that reside in each producers without acknowledgement"
::= { jMSResource 171 }
jMSResourceconnections-sessions-producers-expiredMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that are expired in each producers"
::= { jMSResource 181 }
jMSResourceconnections-sessions-producers-messageWaitTime-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the period of time between when it creates message and when it delivers message"
::= { jMSResource 191 }
jMSResourceconnections-sessions-producers-messageWaitTime-maxTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the maximum period of time between when it creates message and when it delivers message"
::= { jMSResource 192 }
jMSResourceconnections-sessions-producers-messageWaitTime-minTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory

```

```

DESCRIPTION
    "the minimum period of time between when it creates message and when it delivers message"
    ::= { jMSResource 193 }
jMSResourceconnections-sessions-producers-messageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
        ::= { jMSResource 194 }
jMSResourceconnections-sessions-consumers-origin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "name of the destination that each consumers connect to"
        ::= { jMSResource 201 }
jMSResourceconnections-sessions-consumers-messageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in each consumers"
        ::= { jMSResource 211 }
jMSResourceconnections-sessions-consumers-pendingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in each consumers without acknowledgement"
        ::= { jMSResource 221 }
jMSResourceconnections-sessions-consumers-expiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in each consumers"
        ::= { jMSResource 231 }
jMSResourceconnections-sessions-consumers-messageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
        ::= { jMSResource 241 }
jMSResourceconnections-sessions-consumers-messageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
        ::= { jMSResource 242 }
jMSResourceconnections-sessions-consumers-messageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
        ::= { jMSResource 243 }

```

```

jMSResourceconnections-sessions-consumers-messageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
    ::= { jMSResource 244 }

-----
-- jNDIResource
-----

jNDIResource OBJECT IDENTIFIER
    ::= { jeus 29 }

jNDIResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jNDIResource 1 }

-----
-- jTAResource
-----

jTAResource OBJECT IDENTIFIER
    ::= { jeus 30 }

jTAResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jTAResource 1 }

jTAResourceaverageExecutionTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "average processing time of the transactions that are processed on J2EE Server"
    ::= { jTAResource 2 }

jTAResourceactiveTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jTAResource 3 }

jTAResourceprepareTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jTAResource 4 }

jTAResourcepreparedTimeout OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-write
STATUS mandatory
DESCRIPTION
    ""

 ::= { jTAResource 5 }
jTAResourcecommitTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jTAResource 6 }
jTAResourcerecoveryTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jTAResource 7 }
jTAResourceincompleteTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jTAResource 8 }
jTAResourceheuristicRollback OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS write-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jTAResource 9 }
jTAResourceresolution OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jTAResource 10 }
jTAResourcethreadPool OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jTAResource 11 }
jTAResourceactiveCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that are active"

 ::= { jTAResource 101 }
jTAResourcecommittedCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory

```



```

DESCRIPTION
    "the number of the transactions that are committed"
    ::= { jTAResource 111 }
jTAResourcerolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that are rolledback"
        ::= { jTAResource 121 }
jTAResourcetimeoutCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that cause time-out"
        ::= { jTAResource 131 }
jTAResourcetimeoutRolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that is rolledback by timeout"
        ::= { jTAResource 141 }
jTAResourceactiveTimeoutCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that cause active time-out"
        ::= { jTAResource 151 }
jTAResourceprepareTimeoutCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that cause time-out for prepare message"
        ::= { jTAResource 161 }
jTAResourcepreparedTimeoutCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that cause time-out for the global desion message originated
from the root coordinator"
        ::= { jTAResource 171 }
jTAResourcecommitTimeoutCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the transactions that cause time-out for the root coordinator to receive the
response from the sub-coordinator"
        ::= { jTAResource 181 }
jTAResourceheuristicRolledbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION

```

```

        "the number of the transactions that cause huristic rolled-back"
        ::= { jTAResource 191 }
jTAResourceexecutionTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the requests that execute transactions"
        ::= { jTAResource 201 }
jTAResourceexecutionTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the longest execution time for all transactions"
        ::= { jTAResource 202 }
jTAResourceexecutionTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the shortest execution time for all transactions"
        ::= { jTAResource 203 }
jTAResourceexecutionTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total execution time for all transactions"
        ::= { jTAResource 204 }

-----
-- uRLResource
-----

uRLResource OBJECT IDENTIFIER
    ::= { jeus 32 }

uRLResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
        ::= { uRLResource 1 }
uRLResourceuRLInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
        ::= { uRLResource 2 }

-----
-- jMSConnectionResource
-----

jMSConnectionResource OBJECT IDENTIFIER
    ::= { jeus 33 }

```

```

jMSThreadResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jMSThreadResource 1 }
jMSThreadResourcejMSThreadResourceNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the session resource that is created by this connection"
    ::= { jMSThreadResource 2 }
jMSThreadResourcesessions-messageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in each sessions"
    ::= { jMSThreadResource 101 }
jMSThreadResourcesessions-pendingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in this session without acknowledgement"
    ::= { jMSThreadResource 111 }
jMSThreadResourcesessions-expiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in each sessions"
    ::= { jMSThreadResource 121 }
jMSThreadResourcesessions-messageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
    ::= { jMSThreadResource 131 }
jMSThreadResourcesessions-messageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
    ::= { jMSThreadResource 132 }
jMSThreadResourcesessions-messageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
    ::= { jMSThreadResource 133 }
jMSThreadResourcesessions-messageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the total period of time between when it creates message and when it delivers message"
::= { jMSConnectionResource 134 }
jMSConnectionResourcesessions-durableSubscriptionCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the durable subscribers that are created in each sessions"
::= { jMSConnectionResource 141 }
jMSConnectionResourcesessions-producers-destination OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "name of the destination to which each producers send messages"
::= { jMSConnectionResource 151 }
jMSConnectionResourcesessions-producers-messageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that are processed in each producers"
::= { jMSConnectionResource 161 }
jMSConnectionResourcesessions-producers-pendingMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that reside in each producers without acknowledgement"
::= { jMSConnectionResource 171 }
jMSConnectionResourcesessions-producers-expiredMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that are expired in each producers"
::= { jMSConnectionResource 181 }
jMSConnectionResourcesessions-producers-messageWaitTime-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the period of time between when it creates message and when it delivers message"
::= { jMSConnectionResource 191 }
jMSConnectionResourcesessions-producers-messageWaitTime-maxTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the maximum period of time between when it creates message and when it delivers message"
::= { jMSConnectionResource 192 }
jMSConnectionResourcesessions-producers-messageWaitTime-minTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION

```

```

        "the minimum period of time between when it creates message and when it delivers message"
        ::= { jMSTConnectionResource 193 }
jMSTConnectionResourcesessions-producers-messageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
        ::= { jMSTConnectionResource 194 }
jMSTConnectionResourcesessions-consumers-origin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "name of the destination that each consumers connect to"
        ::= { jMSTConnectionResource 201 }
jMSTConnectionResourcesessions-consumers-messageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in each consumers"
        ::= { jMSTConnectionResource 211 }
jMSTConnectionResourcesessions-consumers-pendingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in each consumers without acknowledgement"
        ::= { jMSTConnectionResource 221 }
jMSTConnectionResourcesessions-consumers-expiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in each consumers"
        ::= { jMSTConnectionResource 231 }
jMSTConnectionResourcesessions-consumers-messageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
        ::= { jMSTConnectionResource 241 }
jMSTConnectionResourcesessions-consumers-messageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
        ::= { jMSTConnectionResource 242 }
jMSTConnectionResourcesessions-consumers-messageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
        ::= { jMSTConnectionResource 243 }
jMSTConnectionResourcesessions-consumers-messageWaitTime-totalTime OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the total period of time between when it creates message and when it delivers message"
::= { jMSConnectionResource 244 }
jMSConnectionResourceSessionCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the sessions that are created by this connection"
    ::= { jMSConnectionResource 251 }
jMSConnectionResourceconnectionConsumerCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSConnectionResource 261 }
jMSConnectionResourceconnectionConsumers-origin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSConnectionResource 271 }
jMSConnectionResourceconnectionConsumers-messageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSConnectionResource 281 }
jMSConnectionResourceconnectionConsumers-pendingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSConnectionResource 291 }
jMSConnectionResourceconnectionConsumers-expiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSConnectionResource 301 }
jMSConnectionResourceconnectionConsumers-messageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSConnectionResource 401 }
jMSConnectionResourceconnectionConsumers-messageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory

```

```

DESCRIPTION
    ""

    ::= { jMSConnectionResource 402 }
jMSConnectionResourceconnectionConsumers-messageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jMSConnectionResource 403 }
jMSConnectionResourceconnectionConsumers-messageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jMSConnectionResource 404 }

-----
-- jMSConsumerResource
-----

jMSConsumerResource OBJECT IDENTIFIER
    ::= { jeus 34 }

jMSConsumerResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jMSConsumerResource 1 }
jMSConsumerResourceorigin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "name of the destination that consumer connects to"
    ::= { jMSConsumerResource 101 }
jMSConsumerResourcessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in this consumer"
    ::= { jMSConsumerResource 111 }
jMSConsumerResourcependingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in this consumer without acknowledgement"
    ::= { jMSConsumerResource 121 }
jMSConsumerResourceexpiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in this consumer"

```

```

 ::= { jMSConsumerResource 131 }
jMSConsumerResourcemessageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
 ::= { jMSConsumerResource 141 }
jMSConsumerResourcemessageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
 ::= { jMSConsumerResource 142 }
jMSConsumerResourcemessageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
 ::= { jMSConsumerResource 143 }
jMSConsumerResourcemessageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
 ::= { jMSConsumerResource 144 }
jMSConsumerResourcesendTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time to delivers messages"
 ::= { jMSConsumerResource 151 }
jMSConsumerResourcesendTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time to delivers messages"
 ::= { jMSConsumerResource 152 }
jMSConsumerResourcesendTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time to delivers messages"
 ::= { jMSConsumerResource 153 }
jMSConsumerResourcesendTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time to delivers messages"
 ::= { jMSConsumerResource 154 }

```

-----



```

-- jMSProducerResource
-----

jMSProducerResource OBJECT IDENTIFIER
    ::= { jeus 35 }

jMSProducerResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jMSProducerResource 1 }

jMSProducerResourcedestination OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "name of the destination to which this producer sends messages"
    ::= { jMSProducerResource 6 }

jMSProducerResourcemessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in this producer"
    ::= { jMSProducerResource 111 }

jMSProducerResourcependingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in this producer without acknowledgement"
    ::= { jMSProducerResource 121 }

jMSProducerResourceexpiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in this producer"
    ::= { jMSProducerResource 131 }

jMSProducerResourcemessageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
    ::= { jMSProducerResource 141 }

jMSProducerResourcemessageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
    ::= { jMSProducerResource 142 }

jMSProducerResourcemessageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory

```

```

DESCRIPTION
    "the minimum period of time between when it creates message and when it delivers message"
    ::= { jMSProducerResource 143 }
jMSProducerResourcemessageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
        ::= { jMSProducerResource 144 }
jMSProducerResourcesendTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time to delivers messages"
        ::= { jMSProducerResource 151 }
jMSProducerResourcesendTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time to delivers messages"
        ::= { jMSProducerResource 152 }
jMSProducerResourcesendTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time to delivers messages"
        ::= { jMSProducerResource 153 }
jMSProducerResourcesendTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time to delivers messages"
        ::= { jMSProducerResource 154 }

-----
-- jMSSessionResource
-----

jMSSessionResource OBJECT IDENTIFIER
    ::= { jeus 36 }

jMSSessionResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
        ::= { jMSSessionResource 1 }
jMSSessionResourcejMSEndPointConsumerNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of consumers that are created by this session"

```

```

 ::= { jMSSessionResource 2 }
jMSSessionResourcemessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in this session"
 ::= { jMSSessionResource 101 }
jMSSessionResourcependingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that resides in this session without acknowledgement"
 ::= { jMSSessionResource 111 }
jMSSessionResourceexpiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in this session"
 ::= { jMSSessionResource 121 }
jMSSessionResourcemessageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
 ::= { jMSSessionResource 131 }
jMSSessionResourcemessageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
 ::= { jMSSessionResource 132 }
jMSSessionResourcemessageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
 ::= { jMSSessionResource 133 }
jMSSessionResourcemessageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
 ::= { jMSSessionResource 134 }
jMSSessionResourcedurableSubscriptionCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the durable subscribers that are created in this sessions"
 ::= { jMSSessionResource 141 }
jMSSessionResourceproducers-destination OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "name of the destination to which each producers send messages"
::= { jMSSessionResource 151 }
jMSSessionResourceproducers-messageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that are processed in this producer"
::= { jMSSessionResource 161 }
jMSSessionResourceproducers-pendingMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that reside in each producers without acknowledgement"
::= { jMSSessionResource 171 }
jMSSessionResourceproducers-expiredMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages that are expired in each producers"
::= { jMSSessionResource 181 }
jMSSessionResourceproducers-messageWaitTime-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the period of time between when it creates message and when it delivers message"
::= { jMSSessionResource 191 }
jMSSessionResourceproducers-messageWaitTime-maxTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the maximum period of time between when it creates message and when it delivers message"
::= { jMSSessionResource 192 }
jMSSessionResourceproducers-messageWaitTime-minTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the minimum period of time between when it creates message and when it delivers message"
::= { jMSSessionResource 193 }
jMSSessionResourceproducers-messageWaitTime-totalTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the total period of time between when it creates message and when it delivers message"
::= { jMSSessionResource 194 }
jMSSessionResourceconsumers-origin OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION

```

```

        "name of the destination that each consumers connect to"
        ::= { jMSSessionResource 201 }
jMSSessionResourceconsumers-messageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are processed in each consumer"
        ::= { jMSSessionResource 211 }
jMSSessionResourceconsumers-pendingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that reside in each consumers without acknowledgement"
        ::= { jMSSessionResource 221 }
jMSSessionResourceconsumers-expiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the messages that are expired in each consumers"
        ::= { jMSSessionResource 231 }
jMSSessionResourceconsumers-messageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time between when it creates message and when it delivers message"
        ::= { jMSSessionResource 241 }
jMSSessionResourceconsumers-messageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the maximum period of time between when it creates message and when it delivers message"
        ::= { jMSSessionResource 242 }
jMSSessionResourceconsumers-messageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time between when it creates message and when it delivers message"
        ::= { jMSSessionResource 243 }
jMSSessionResourceconsumers-messageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time between when it creates message and when it delivers message"
        ::= { jMSSessionResource 244 }
jMSSessionResourcesendTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the period of time to delivers messages"
        ::= { jMSSessionResource 251 }
jMSSessionResourcesendTime-maxTime OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the maximum period of time to delivers messages"
::= { jMSSessionResource 252 }
jMSSessionResourceEndTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the minimum period of time to delivers messages"
    ::= { jMSSessionResource 253 }
jMSSessionResourceEndTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the total period of time to delivers messages"
    ::= { jMSSessionResource 254 }
jMSSessionResourceCommitCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSSessionResource 261 }
jMSSessionResourceRollbackCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSSessionResource 271 }
jMSSessionResourceTransactionCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSSessionResource 281 }

-----
-- eJBEngineMo
-----

eJBEngineMo OBJECT IDENTIFIER
    ::= { jeus 41 }

eJBEngineMoObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { eJBEngineMo 1 }
eJBEngineMoBlockThreadCount OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only

```

```

STATUS mandatory
DESCRIPTION
    "the number of the blocked threads of this EJB Engine"
::= { eJBEngineMo 2 }
eJBEngineMostats OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { eJBEngineMo 3 }

-----
-- contextGroupMo
-----

contextGroupMo OBJECT IDENTIFIER
::= { jeus 51 }

contextGroupMoobjectName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard MBean object name"
::= { contextGroupMo 1 }
contextGroupMowebModules OBJECT-TYPE
SYNTAX SEQUENCE OF DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard object names of the Web Modules that is deployed on this Context Group"
::= { contextGroupMo 2 }
contextGroupMowebListeners OBJECT-TYPE
SYNTAX SEQUENCE OF DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard object names of the Listeners that is registered on this Context Group"
::= { contextGroupMo 3 }
contextGroupMosessionContainer OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { contextGroupMo 4 }
contextGroupMosessionTimeout OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-write
STATUS mandatory
DESCRIPTION
    ""
::= { contextGroupMo 5 }
contextGroupModeployObjects OBJECT-TYPE
SYNTAX SEQUENCE OF DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION

```

```

""
::= { contextGroupMo 8 }

-----
-- dBConnectionPoolMo
-----

dBConnectionPoolMo OBJECT IDENTIFIER
::= { jeus 52 }

dBConnectionPoolMoobjectName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard MBean object name"
::= { dBConnectionPoolMo 1 }
dBConnectionPoolMoblockDuration OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-write
STATUS mandatory
DESCRIPTION
    "the value of the interval which Web Engine considers as BLOCK when the db connection of this
DB Connection Pool executes a SQL query"
::= { dBConnectionPoolMo 2 }
dBConnectionPoolModBConnectionPoolInfo-dBConnectionInfo OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { dBConnectionPoolMo 3 }
dBConnectionPoolModBConnectionPoolInfo-currentPoolSize OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { dBConnectionPoolMo 4 }
dBConnectionPoolModBConnectionPoolInfo-freeConnectionNum OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { dBConnectionPoolMo 5 }
dBConnectionPoolModBConnectionPoolInfo-activeConnectionNum OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { dBConnectionPoolMo 6 }
dBConnectionPoolModBConnectionPoolInfo-connectionPoolID OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

```



```

::= { dBConnectionPoolMo 7 }
dBConnectionPoolModBConnectionPoolInfo-connectionPoolingRule OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 8 }
dBConnectionPoolModBConnectionPoolInfo-connectionUrl OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 9 }
dBConnectionPoolModBConnectionPoolInfo-driverClassName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 10 }
dBConnectionPoolModBConnectionPoolInfo-connectionArgs OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 11 }
dBConnectionPoolModBConnectionPoolInfo-initCapacity OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 12 }
dBConnectionPoolModBConnectionPoolInfo-maxCapacity OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 13 }
dBConnectionPoolModBConnectionPoolInfo-incrementRate OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 14 }
dBConnectionPoolModBConnectionPoolInfo-maxIdleTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 15 }
dBConnectionPoolModBConnectionPoolInfo-dynamicIncrement OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 17 }
dBConnectionPoolModBConnectionPoolInfo-connectionTimeOut OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 18 }
dBConnectionPoolModBConnectionPoolInfo-loginDelay OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 19 }
dBConnectionPoolModBConnectionPoolInfo-closeDelay OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 20 }
dBConnectionPoolModBConnectionPoolInfo-closeLongActiveConnection OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 21 }
dBConnectionPoolModBConnectionPoolInfo-maxActiveTime OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 22 }
dBConnectionPoolModBConnectionPoolInfo-maxUseCount OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 23 }
dBConnectionPoolModBConnectionPoolInfo-checkQuery OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
"""

::= { dBConnectionPoolMo 24 }
dBConnectionPoolMomin OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-write
STATUS mandatory
DESCRIPTION

```

```

    ::= { dBConnectionPoolMo 26 }
dBConnectionPoolMomax OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 28 }
dBConnectionPoolMostep OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 30 }
dBConnectionPoolModBConnectionPoolInfo-maxAliveTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 31 }
dBConnectionPoolMomaxIdleTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 33 }
dBConnectionPoolMomaxAliveTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 35 }
dBConnectionPoolModynamicIncrement OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 37 }
dBConnectionPoolMogetConnectionTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 38 }
dBConnectionPoolMocloseLongActiveConnection OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { dBConnectionPoolMo 39 }
dBConnectionPoolMomaxActiveTime OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-write
STATUS mandatory
DESCRIPTION
    ""

::= { dBConnectionPoolMo 40 }
dBConnectionPoolMoMaxUseCount OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { dBConnectionPoolMo 42 }
dBConnectionPoolMoActiveThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the threads that are being used in thread pool of this DB Connection Pool"
::= { dBConnectionPoolMo 101 }
dBConnectionPoolMoBlockThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the threads that are blocked in thread pool of this DB Connection Pool"
::= { dBConnectionPoolMo 111 }
dBConnectionPoolMoAllThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of all threads that are in thread pool of this DB Connection Pool"
::= { dBConnectionPoolMo 121 }

-----
-- threadPoolMo
-----

threadPoolMo OBJECT IDENTIFIER
    ::= { jeus 53 }

threadPoolMoObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { threadPoolMo 1 }
threadPoolMoMin OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { threadPoolMo 3 }
threadPoolMoMax OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write

```

```

STATUS mandatory
DESCRIPTION
"""

::= { threadPoolMo 5 }
threadPoolMostep OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 7 }
threadPoolMomaxIdleTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 9 }
threadPoolMomaxQueue OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 11 }
threadPoolMomaxWaitQueue OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 13 }
threadPoolMomaxThreadActiveTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 14 }
threadPoolMonotifyThreshold OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 15 }
threadPoolMorestartThreshold OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        """

::= { threadPoolMo 16 }
threadPoolMoactiveThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the threads that are being used in thread pool of this Thread Pool"

```

```

        ::= { threadPoolMo 101 }
threadPoolMoblockThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the threads that are blocked in thread pool of this Thread Pool"
        ::= { threadPoolMo 111 }
threadPoolMoallThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of all threads that are in thread pool of this Thread Pool"
        ::= { threadPoolMo 121 }
threadPoolMomaxThreadCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
        ::= { threadPoolMo 131 }
threadPoolMowaitQueueCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
        ::= { threadPoolMo 141 }

-----
-- webEngineMo
-----

webEngineMo OBJECT IDENTIFIER
    ::= { jeus 54 }

webEngineMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
        ::= { webEngineMo 1 }
webEngineMocontextGroups OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of Context Groups that are deployed on this Web Engine"
        ::= { webEngineMo 2 }
webEngineMoconfigInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the contents of the configuration file(WEBMain.xml) of this Web Engine"
        ::= { webEngineMo 3 }
webEngineMoserverStatus OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the status of the session server that is configured in this Web Engine"
::= { webEngineMo 4 }
webEngineModBConnectionPool OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of db connection pools in this Web Engine"
    ::= { webEngineMo 5 }
webEngineMocontextGroupNames OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webEngineMo 6 }
webEngineMosessionContainer OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webEngineMo 7 }
webEngineMowebtConnectionGroup OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webEngineMo 8 }
webEngineMoconfiguration OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webEngineMo 9 }
webEngineMocheckThreadPool OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webEngineMo 11 }
webEngineMocheckClassReload OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { webEngineMo 13 }
webEngineMocheckSession OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory

```

```

DESCRIPTION
""

::= { webEngineMo 15 }
webEngineMocheckDbConnectionPool OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

        ::= { webEngineMo 17 }
webEngineMofreeMemory-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

        ::= { webEngineMo 101 }
webEngineMototalMemory-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

        ::= { webEngineMo 111 }

-----
-- webListenerMo
-----

webListenerMo OBJECT IDENTIFIER
    ::= { jeus 55 }

webListenerMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { webListenerMo 1 }
webListenerMothreadPools OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the Thread Pools that is registered on this Web Listener"
    ::= { webListenerMo 2 }
webListenerMotype OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the type of this Web Listener"
    ::= { webListenerMo 3 }
webListenerMoport OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

```



```

::= { webListenerMo 4 }
webListenerMoreadTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { webListenerMo 6 }
webListenerMoreconnectTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { webListenerMo 8 }
webListenerMopostdataReadTimeout OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

::= { webListenerMo 10 }

-----
-- webtConnectionGroupMo
-----

webtConnectionGroupMo OBJECT IDENTIFIER
    ::= { jeus 56 }

webtConnectionGroupMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webtConnectionGroupMo 1 }
webtConnectionGroupMototalConnectionCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webtConnectionGroupMo 101 }
webtConnectionGroupMofreeConnectionCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webtConnectionGroupMo 111 }
webtConnectionGroupMousedConnectionCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webtConnectionGroupMo 121 }

```

```

-----
-- jMSClientResource
-----

jMSClientResource OBJECT IDENTIFIER
    ::= { jeus 61 }

jMSClientResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jMSClientResource 1 }
jMSClientResourcehostAddress OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "remote address of the socket to which clients are connected"
    ::= { jMSClientResource 2 }
jMSClientResourceport OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "remote port of the socket to which clients are connected"
    ::= { jMSClientResource 3 }
jMSClientResourcejMSConnectionResourceNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard object names of the connections that are created by JMS clients"
    ::= { jMSClientResource 4 }
jMSClientResourcenamePartString OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSClientResource 6 }
jMSClientResourceconnectionCount OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the number of the connections that are created by JMS clients"
    ::= { jMSClientResource 101 }

-----
-- jMSQueueConnectionFactoryResource
-----

jMSQueueConnectionFactoryResource OBJECT IDENTIFIER
    ::= { jeus 62 }

jMSQueueConnectionFactoryResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard MBean object name"
::= { jMSQueueConnectionFactoryResource 1 }
jMSQueueConnectionFactoryResource OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { jMSQueueConnectionFactoryResource 3 }

-----
-- jMSQueueDestinationResource
-----

jMSQueueDestinationResource OBJECT IDENTIFIER
::= { jeus 63 }

jMSQueueDestinationResourceobjectName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard MBean object name"
::= { jMSQueueDestinationResource 1 }
jMSQueueDestinationResourceobjectName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the name of this JMS Destination"
::= { jMSQueueDestinationResource 2 }
jMSQueueDestinationResourceexportName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the JNDI export name of this JMS Destination"
::= { jMSQueueDestinationResource 3 }
jMSQueueDestinationResourcetype OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the type of this JMS Destination"
::= { jMSQueueDestinationResource 4 }
jMSQueueDestinationResourcedestination OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the reference of the DestinationImpl object, which has destination information"
::= { jMSQueueDestinationResource 8 }
jMSQueueDestinationResourcejMSConsumerResourceNames OBJECT-TYPE
SYNTAX SEQUENCE OF DisplayString
ACCESS read-only
STATUS mandatory

```

```

DESCRIPTION
    "names of JMS clients that belong to JMS Destination"
 ::= { jMSQueueDestinationResource 9 }
jMSQueueDestinationResourceremainingMessages OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 10 }
jMSQueueDestinationResourcemessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 101 }
jMSQueueDestinationResourcependingMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 111 }
jMSQueueDestinationResourceexpiredMessageCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 121 }
jMSQueueDestinationResourcemessageWaitTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 122 }
jMSQueueDestinationResourcemessageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 123 }
jMSQueueDestinationResourcemessageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 124 }
jMSQueueDestinationResourcemessageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

 ::= { jMSQueueDestinationResource 125 }

```

```

jMSQueueDestinationResourcesendTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jMSQueueDestinationResource 131 }
jMSQueueDestinationResourcesendTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jMSQueueDestinationResource 132 }
jMSQueueDestinationResourcesendTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jMSQueueDestinationResource 133 }
jMSQueueDestinationResourcesendTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jMSQueueDestinationResource 134 }

-----
-- jMSDurableSubscriberResource
-----

jMSDurableSubscriberResource OBJECT IDENTIFIER
    ::= { jeus 64 }

jMSDurableSubscriberResourceobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jMSDurableSubscriberResource 1 }
jMSDurableSubscriberResourceclientID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the name of JMS Durable Subscriber"
    ::= { jMSDurableSubscriberResource 2 }
jMSDurableSubscriberResourceclientID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the client ID of JMS Durable Subscriber"
    ::= { jMSDurableSubscriberResource 3 }
jMSDurableSubscriberResourceremainingMessages OBJECT-TYPE
    SYNTAX DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the number of the messages which are alive in durable subscriber"
::= { jMSDurableSubscriberResource 5 }
jMSDurableSubscriberResourceselector OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "selector value which is configured in durable subscriber"
::= { jMSDurableSubscriberResource 6 }

-----
-- jMSTopicConnectionFactoryResource
-----

jMSTopicConnectionFactoryResource OBJECT IDENTIFIER
::= { jeus 65 }

jMSTopicConnectionFactoryResourceobjectName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard MBean object name"
::= { jMSTopicConnectionFactoryResource 1 }
jMSTopicConnectionFactoryResourcecname OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { jMSTopicConnectionFactoryResource 3 }

-----
-- jMSTopicDestinationResource
-----

jMSTopicDestinationResource OBJECT IDENTIFIER
::= { jeus 66 }

jMSTopicDestinationResourceobjectName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "JMX-standard MBean object name"
::= { jMSTopicDestinationResource 1 }
jMSTopicDestinationResourcecname OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the name of this JMS Destination"
::= { jMSTopicDestinationResource 2 }
jMSTopicDestinationResourceexportName OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only

```

```

STATUS mandatory
DESCRIPTION
    "the JNDI export name of this JMS Destination"
::= { jMSTopicDestinationResource 3 }
jMSTopicDestinationResourceType OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the type of this JMS Destination"
::= { jMSTopicDestinationResource 4 }
jMSTopicDestinationResourcejMSDurableSubscriberResourceNames OBJECT-TYPE
SYNTAX SEQUENCE OF DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the names of JMS Durable Subscribers that belong to JMS Destination"
::= { jMSTopicDestinationResource 6 }
jMSTopicDestinationResourcedestination OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "the reference of the DestinationImpl object, which has destination information"
::= { jMSTopicDestinationResource 8 }
jMSTopicDestinationResourcejMSConsumerResourceNames OBJECT-TYPE
SYNTAX SEQUENCE OF DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    "names of JMS clients that belong to JMS Destination"
::= { jMSTopicDestinationResource 9 }
jMSTopicDestinationResourcemessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { jMSTopicDestinationResource 101 }
jMSTopicDestinationResourcependingMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { jMSTopicDestinationResource 111 }
jMSTopicDestinationResourceexpiredMessageCount-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""
::= { jMSTopicDestinationResource 121 }
jMSTopicDestinationResourcemessageWaitTime-count OBJECT-TYPE
SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

```

```

::= { jMSTopicDestinationResource 122 }
jMSTopicDestinationResourcemessageWaitTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 123 }
jMSTopicDestinationResourcemessageWaitTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 124 }
jMSTopicDestinationResourcemessageWaitTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 125 }
jMSTopicDestinationResourcesendTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 131 }
jMSTopicDestinationResourcesendTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 132 }
jMSTopicDestinationResourcesendTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 133 }
jMSTopicDestinationResourcesendTime-totalTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

::= { jMSTopicDestinationResource 134 }

-----
-- threadPool
-----

threadPool OBJECT IDENTIFIER
    ::= { jeus 71 }

threadPoolObjectName OBJECT-TYPE

```



```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

    ::= { threadPool 1 }
threadPoolthreadOperationInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { threadPool 2 }
threadPoolmax OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { threadPool 4 }
threadPoolperiod OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-write
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { threadPool 6 }

-----
-- jEUSManager
-----

jEUSManager OBJECT IDENTIFIER
    ::= { jeus 77 }

jEUSManagerobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "JMX-standard MBean object name"
    ::= { jEUSManager 1 }
jEUSManagerserverVersion OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the version of JEUS that is being used"
    ::= { jEUSManager 2 }
jEUSManagerserverVendor OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        "the J2EE platform vendor of this JEUS Manager"
    ::= { jEUSManager 3 }
jEUSManagerjavaVMs OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only

```

```

STATUS mandatory
DESCRIPTION
    "JMX-standard object names of the JVMs on which JEUS Manager is running"
::= { jEUSManager 4 }
jEUSManagerjeusServices OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 5 }
jEUSManagerj2eeServers OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 6 }
jEUSManagernodesFromDescriptor OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 9 }
jEUSManageraliveNodeNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 10 }
jEUSManagerjeusHome OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 11 }
jEUSManagerpID OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 12 }
jEUSManagerj2eeServerNames OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { jEUSManager 15 }

-----
-- webServerInfo
-----

webServerInfo OBJECT IDENTIFIER

```

```

::= { jeus 81 }

webServerInfoObjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 1 }
webServerInfoNodeInfo OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 2 }
webServerInfoSvrAllInfo OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 3 }
webServerInfoSvrCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 101 }
webServerInfoExecCount-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 111 }
webServerInfoAvgTime-count OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 121 }
webServerInfoAvgTime-maxTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 122 }
webServerInfoAvgTime-minTime OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { webServerInfo 123 }
webServerInfoAvgTime-totalTime OBJECT-TYPE

```

```

SYNTAX DisplayString
ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

 ::= { webServerInfo 124 }

-----
-- subjectMo
-----

subjectMo OBJECT IDENTIFIER
 ::= { jeus 101 }

subjectMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { subjectMo 1 }
subjectMosubjectNames OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { subjectMo 2 }

-----
-- securityDomainMo
-----

securityDomainMo OBJECT IDENTIFIER
 ::= { jeus 102 }

securityDomainMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { securityDomainMo 1 }
securityDomainModomainName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { securityDomainMo 2 }
securityDomainMopolicys OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { securityDomainMo 3 }
securityDomainMosubjects OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString

```

```

ACCESS read-only
STATUS mandatory
DESCRIPTION
    ""

 ::= { securityDomainMo 4 }

-----
-- policyMo
-----

policyMo OBJECT IDENTIFIER
 ::= { jeus 103 }

policyMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { policyMo 1 }
policyMopolicyIds OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { policyMo 2 }

-----
-- securityMo
-----

securityMo OBJECT IDENTIFIER
 ::= { jeus 104 }

securityMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { securityMo 1 }
securityMocurrentDomain OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { securityMo 2 }
securityMosecurityDomains OBJECT-TYPE
    SYNTAX SEQUENCE OF DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""

    ::= { securityMo 3 }

-----
-- jMSEngineMo

```

```

-----

jMSEngineMo OBJECT IDENTIFIER
    ::= { jeus 105 }

jMSEngineMojMSResource OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSEngineMo 1 }
jMSEngineMoengineName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSEngineMo 2 }
jMSEngineMoobjectName OBJECT-TYPE
    SYNTAX DisplayString
    ACCESS read-only
    STATUS mandatory
    DESCRIPTION
        ""
    ::= { jMSEngineMo 3 }

END

```